



Specifications

Operating Temperature	-20~+55℃		
Operating Humidity	45~85%		
Store Temperature	-45~+80℃		
Store Humidity	95%RH		
Degree of Protection	IP65(IEC 60529) IP20(IEC 60529)		
Insulation Resistance	100MΩ 500V DC		
Dielectric Strength	2,500VAC/1分钟 2,000VAC/1分钟		
Vibration Resistance	10~500Hz	0.35mm	50m/s ²
	10~500Hz	0.35mm	50m/s ²
	5~55Hz 30Hz	0.5mm 1.5mm	
Shock resistance	150 m/s ² 1,000 m/s ²		
	100 m/s ² 1,000 m/s ²		
Mechanical Life	250,000		
	5,000,000 1,000,000 250,000 100,000		
	250,000 100,000		
Electrical Life	100,000		
	100,000 50,000		


Contact Ratings

Rated insulation voltage		600V			
Rated current		10A			
Rated voltage		24V	120V	240V	380V
AC (50/60Hz)	(AC-12)	10A	10A	6A	2A
	(AC-15)	10A	6A	3A	1.9A
DC	(DC-12)	8A	2.2A	1.1A	-
	(DC-13)	4A	1.1A	0.55A	-

LED Ratings

Unit type	Operating Voltage	Current consumption	Color code
LSED-6②	6V AC/DC	10mA(A, R, Y) 7mA(G, PW, S)	A : Amber G : Green PW : White R : Red S : Blue Y : Yellow
LSED-1②	12V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED-2②	24V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED-H②	110V AC/DC	5mA	
LSED-M3②	230/240V AC/DC	3mA	


Combination Mode

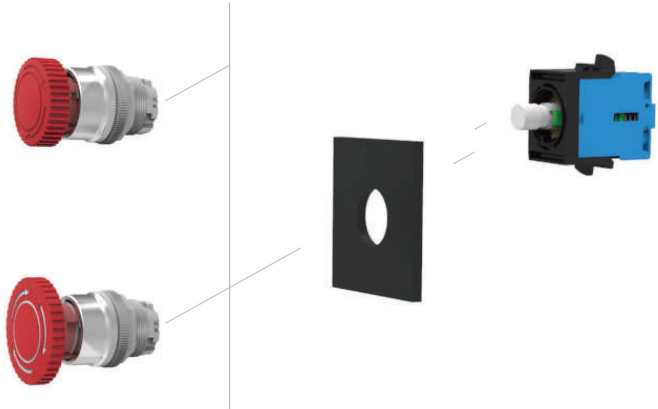

How to order:

Mounting Size	Operation Type	Operation Characteristic	Contact Structure	Color	Voltage
Ø22	Flush Extended E-stop Small E-stop	Flush without LED Flat round Flush with LED Ring round with LED	NO NC 2NO NC NO+NC	Red Green Yellow White Blue Orange	24VDC 12VDC 6.3VDC 110VAC 220VAC

Installation Size





RJSMS22E SERIES

MUSHROOM EMERGENCY STOP SWITCH




Ø22 Small E-Stop Switch



Product appearance	Operation	Contact	Model	Colour
	Push-lock Turn Reset	1NC	RJSMS22E -X101	 Red
		2NC	RJSMS22E -X102	

When pressed, the button is locked in the depressed position and is reset when either pulled or turned clockwise.

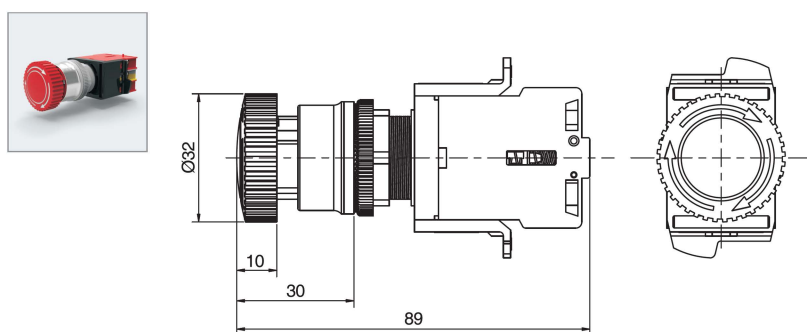RJSMS22E MUSHROOM EMERGENCY




Ø22 Small E-Stop Switch with LED Illumination


Product appearance	Operation	Contact	Model	Colour	Rated Voltage
	Push-lock Turn Reset	1NC	RJSMS22E-X701	 Red	24VDC 12VDC 3VDC 110VAC 220VAC
		2NC	RJSMS22E-X702		

When pressed, the button is locked in the depressed position and is reset when either pulled or turned clockwise.

RJSMS22E Mushroom Emergency
(with LED)

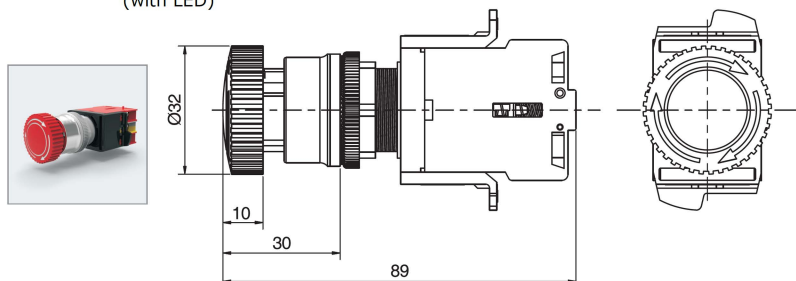


Ø22 Large E-Stop Switch


Product appearance	Operation	Contact	Model	Colour
<div>Ø40mm Mushroom</div> 	Push-lock Turn Reset	1NC	RJSMS22E-8101	<div><div>R</div>Red</div>
		2NC	RJSMS22E-8102	

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

RJSMS22E Mushroom Emergency

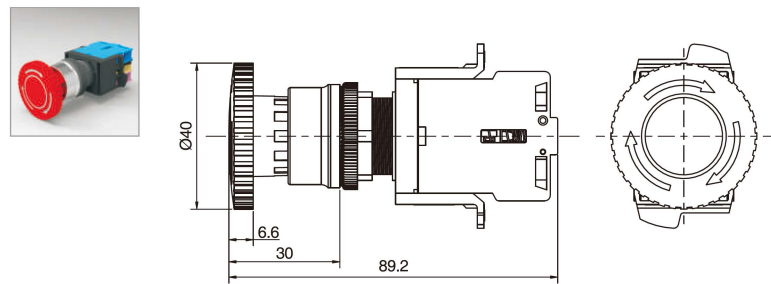

Ø22 Large E-Stop Switch with LED Illumination

Product appearance	Operation	Contact	Model	Colour	Rated Voltage
<div>Ø40mm Mushroom</div> 	Push-lock Turn Reset	1NC	RJSMS22E-8701	<div><div>R</div>Red</div>	24VDC 12VDC 6.3VDC 110VAC 220VAC
		2NC	RJSMS22E-8702		

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

RJSMS22E Mushroom Emergency (with LED)

