RJS Electronics Ltd





Anti Vandal Toggle Switch

Features & Benefits

- Simple and reliable operation
- Ring LED illumination
- IP67 rated
- Soldered wire leads (500mm long) optional

Specifications


Electrical Rating	10A 250VAC				
Insulation Resistance	≥100MΩ Max				
Dielectric Strength	2,000VAC				
Contact Resistance	≤50mΩ Max				
Electrical Life	6,000 Cycles				
Mechanical Life	200,000 Cycles				
Operating Temperature	-20°C to 55° C				
Moisture Protection	IP67				
Actuation Force	4N				
Panel Thickness	1-10mm				
Mounting Nut Torque	5-14Nm				


Part Number


RJS -				TOG	-		-		-					L
	19 19mm 22 22mm	Blank (No LED) L (Ring LED)	Blank (Momentary) A (Latching)		3 C D	- 1 Pole off - - 1 Pole off - - 1 Pole On - - 1 Pole On - - 1 Pole (On)	(On) Off - On Off - (On)	R (Ring)	(F C	Blank (Non-illuminated) W - White R - Red O - Orange G - Green B - Blue	BS Brushed steel BLK Black anodised	3.3V 6V 12V 24V	W Wire Leads (500mm long) Blank (No wires)	



Anti Vandal Toggle Switch Ø 22mm

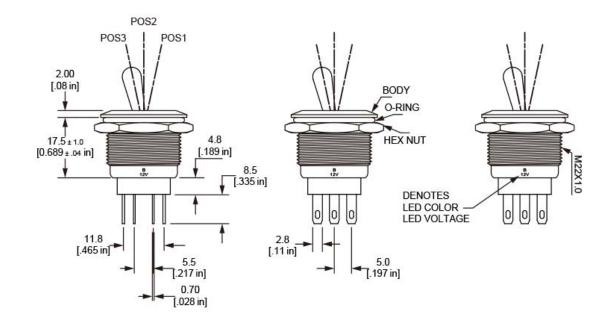







	POS.3	POS.2	POS.1
Switching Functions	2	卫	£
2 - OFF - ON	OFF	-	ON
3 - OFF - (ON)	OFF	-	(ON)
C - ON - OFF - ON	ON	OFF	ON
D - ON - OFF - (ON)	ON	OFF	(ON)
J - (ON) - OFF - (ON)	(ON)	OFF	(ON)

NOTES: 1. Lever do not stop at "-" position.
2. () = Denotes function is momentary