
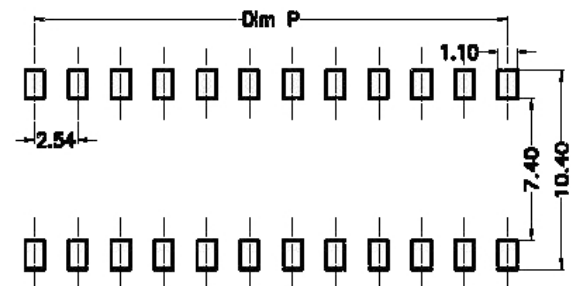
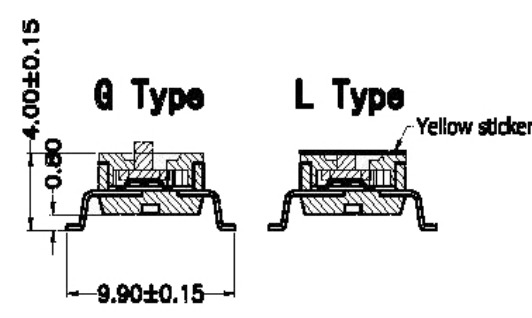
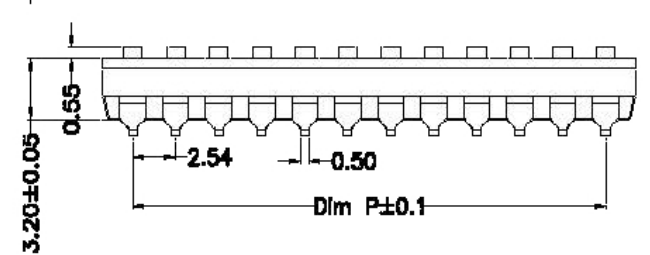


Poles	Dim P	Dim L
1P	---	3.54
2P	2.54	6.08
3P	5.08	8.62
4P	7.62	11.16
5P	10.16	13.70
6P	12.70	16.24
7P	15.24	18.78
8P	17.78	21.32
9P	20.32	23.86
10P	22.86	26.40
11P	25.40	28.94
12P	27.94	31.48

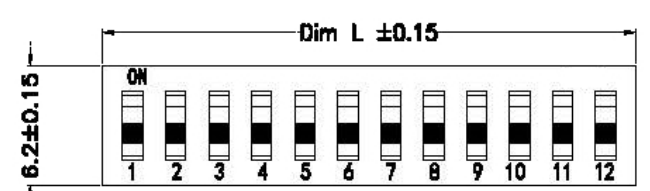


P.C.B. LAYOUT

Specifications

- Contact Rating
 - Switching.....25mA,24VDC
 - Non-Switching.....100mA,50VDC
- Contact Resistance
 - Initial.....50m Ω/Max
 - After Reliability Test..... 100m Ω/Max
- Insulation Resistance
 - 100MΩ/Min. at 500 VDC
- Dielectric Strength
 - 500VAC/1minute
- Operating Force
 - 800g /max
- Travel
 -0.9mm
- Mechanical Life
 -5,000 cycles (Min.)
- Electrical Life
 -2,000 cycles
- Operating Temperature
 --20℃~+70℃
- Storage Temperature
 --40℃~+85℃

HOW TO ORDER

DM - XX - X XX - XXX - XXX

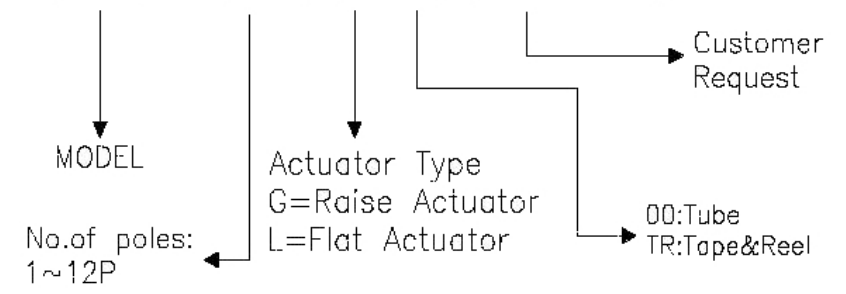

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE
X.	±0.5	X'	±5'	UNITS	mm	
.X	±0.3	.X'	±3'	SHEET SIZE	A4	SERIES
.XX	±0.1	.XX'	±1'	RJS-DM-F01		
DRAWING TYPE						
SCALE	1:1	SHEET	1 OF 1			
DRAWING NO.						