



## Characteristics


Insulation Resistance	100M $\Omega$ min (at 500VDC)	Item 4.11 of IEC 61810-7
Dielectric Strength Between Contacts Between Contact and Coil	50Hz 750V 50Hz 1500V 50Hz	Item 4.9 of IEC 61810-7 Item 4.9 of IEC 61810-7
Shock Resistance	98m/s <sup>2</sup> 11ms	Item 4.26 of IEC 61810-7
Vibration Resistance	10Hz~55Hz Double amplitude 1.5mm	Item 4.28 of IEC 61810-7
Terminals Strength	10N	Item 4.24 of IEC 61810-7
Ambient Temperature	-40°C~70°C	
Relative Humidity	5% to 85%	Item 4.16 of IEC 61810-7
Mass	13g	Item 4.7 of IEC 61810-7

## Safety Approvals


Safety approval	UL&CUR	TÜ V	CQC
Load	15A/125VAC,28VDC TV-5 ,120VAC, 240VAC	6A/240VAC 10A/28VDC	6A/250VAC

## Dimensions


mm

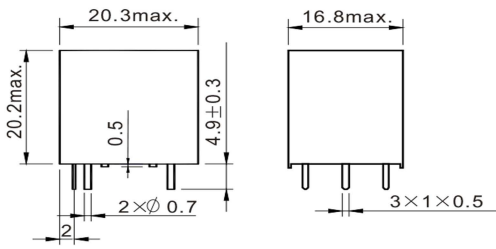

Dimensions



Mounting  
(Bottom view)

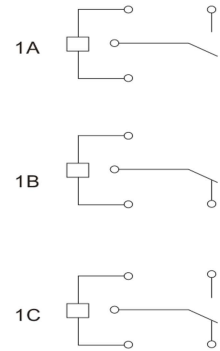

Wiring diagram  
(Bottom view)

**CAUTION:** In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.

## Reference Data

