

22.3×16.6×11

COC 08001023387

us E160644 R50126372

## Features

- Super light in weight.
- High sensitivity.
- Switching capacity up to 16A.
- PC board mounting.

## Contact Data

Contact Arrangement	1A (SPSTNO) 、 1C (SPDT(B-M))		
Contact Material	AgCdO AgSnO <sub>2</sub>		
Contact Rating (resistive)	1A: 16A/250VAC,30VDC;1C: NO:16A/250VAC,30VDC NC:10A/250VAC,30VDC TuV 16A/250VAC,14VDC		
Max. Switching Power	480W 4000VA		
Max. Switching Voltage	110VDC 380VAC	Max. Switching Current: 16A	
Contact Resistance or Voltage drop	≤50mΩ	Item 4.12 of IEC 61810-7	
Operational life	Electrical	10 <sup>5</sup>	Item 4.30 of IEC 61810-7
	Mechanical	10 <sup>7</sup>	Item 4.31 of IEC 61810-7

**CAUTION:** 1.For the intermediate current, it only applies to the room temperature.

## Coil Parameter

Dash numbers	Coil voltage VDC		Coil resistance Ω ±10%	Pickup voltage VDC(max) (75%of rated voltage )	Release voltage VDC(min) (5% of rated voltage)	Coil power consumption W	Operate Time ms	Release Time ms
	Rated	Max.						
005-200	5	6.5	125	3.75	0.25	0.20	≤10	≤5
006-200	6	7.8	180	4.50	0.30			
009-200	9	11.7	405	6.75	0.45			
012-200	12	15.6	720	9.00	0.60			
018-200	18	23.4	1620	13.5	0.90			
024-200	24	31.2	2880	18.0	1.20			
048-250	48	52.8	9216	38.4	2.40	0.25	≤10	≤5
005-450	5	6.5	56	3.75	0.25	0.45	≤10	≤5
006-450	6	7.8	80	4.50	0.30			
009-450	9	11.7	180	6.75	0.45			
012-450	12	15.6	320	9.00	0.60			
018-450	18	23.4	720	13.5	0.90			
024-450	24	31.2	1280	18.0	1.20			
048-450	48	52.8	5120	38.4	2.40			
100-600	100	130	16600	80.0	10.0	0.6	≤10	≤5

**CAUTION:** 1.The use of any coil voltage less than the rated coil voltage will compromise the operation of the relay.  
2.Pickup and release voltage are for test purposes only and are not to be used as design criteria.

## Operation condition





Insulation Resistance	100MΩ min (at 500VDC)	Item 7 of IEC 60255-5
Dielectric Strength Between contacts Between contact and coil	50Hz 750V 50Hz 1500V	Item 6 of IEC60255-5 Item 6 of IEC60255-5
Shock resistance	100m/s <sup>2</sup> 11ms	IEC 68-2-27 Test Ea
Vibration resistance	10Hz~55Hz double amplitude 1.5mm	IEC 68-2-6 Test Fc
Terminals strength	10N	IEC68-2-21 Test Ua1
Solderability	235°C ±2°C 3s±0.5s	IEC 68-2-20 Test Ta method 1
Ambient Temperature	-40°C~85°C	
Relative Humidity	85% (at 20°C)	IEC 68-2-3 Test Ca
Mass	10g	

## Safety approvals

Safety approval	UL&CUR	TU V	CQC
Load	1A: 16A/250VAC 1C: 10A/250VAC	16A/250VAC;14VDC	16A/250VAC

## Dimensions

mm /inch

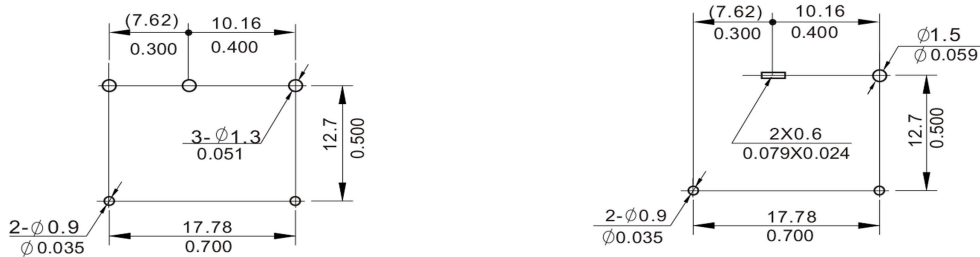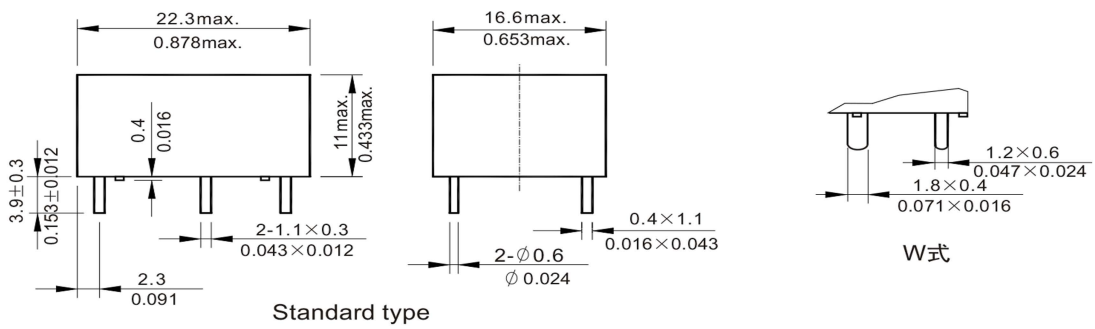

Wiring diagram(Bottom view)

NOTES 1).Dimensions are in millimeters.  
2).Inch equivalents are given for general information only.