


» Features

- Metal dome and rubber dome options.
- Precise design terminal type adequate for DIP IC pitch size (multiple of 2.54mm).
- Adequate for DIP & SMT.
- Several LED colors options.
- Several traveling force options.
- Several cap legends options.

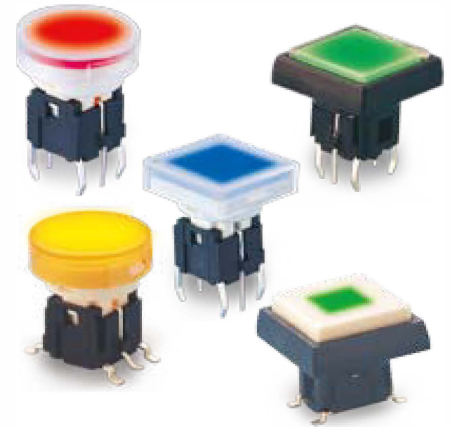

» Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment , communications apparatus, TV sets, VCRs, etc.

» Specifications

SERIES	PB617	PB627	PB637	TP647
Rating	50mA 48VDC	10mA 12VDC	50mA 48VDC	50mA 12VDC
Insulation Resistance	100MΩ Min (at 500 VDC)	100MΩ Min (at 500 VDC)	100MΩ Min (at 500 VDC)	100MΩ Min (at 500 VDC)
Dielectric Strength	AC 250V (50/60 Hz for 1 minute)	AC 250V (50/60 Hz for 1 minute)	AC 250V (50/60 Hz for 1 minute)	AC 250V (50/60 Hz for 1 minute)
Contact Resistance	100mΩ Max. (Initial)	500mΩ Max. (Initial)	100mΩ Max. (Initial)	20mΩ Max. (Initial)
Electrically Life	300,000 Cycles Min	100,000 Cycles Min	300,000 Cycles Min	100,000 Cycles Min
Ambient Temperature	-20°C~ +70°C	-20°C~ +70°C	-20°C~ +70°C	-20°C~ +70°C
Total Trovel	0.25 ± 0.1mm	1.0 ± 0.2mm	0.6 ± 0.2mm	1.0mm Min
Operating Force	160 ± 50gf	100 ± 40gf	250 ± 50gf	200gf Min
	100 ± 30gf			
	250 ± 50gf			

» Product selection

PB	[]		[]		[] - []		[]		[]	
	SPRING MATERIAL		FUNCTION		CAP COLOR		LASER ETCHING			
			Non-LED							
	617 Metal Dome		_ Standard type		1 Misty Silver		01 			
	627 Rubber Dome		M SMT type		2 Bright Silver		02 			
			LED		3 Gold		03 OK			
			L Standard type		4 White		04 			
			ML SMT type		5 Bright Black		05 			
					6 Red		06 			
					7 Misty Black		07 			
					8 Sky blue		08 			
					9 Gunmetal black		09 			
					A Orange		10 			

» LED Specifications

Color	VR	IF	Recommended Operating Current	VF	
				Nor	Max
Red	DC 5V	20mA	20mA	1.7V	2.4V
Green	DC 5V	20mA	20mA	1.9V	2.4V
Yellow	DC 5V	20mA	20mA	1.9V	2.4V
Blue	DC 5V	20mA	20mA	3.0V	3.6V
White	DC 5V	20mA	20mA	3.0V	3.6V

For the specification about the other LEDs, please contact with sales department



» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout



PB6171FL(Metal) PB6271FL(Rubber)

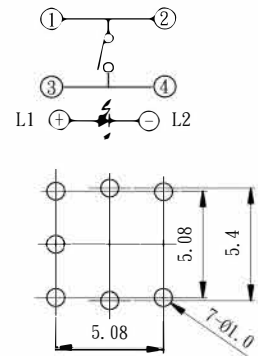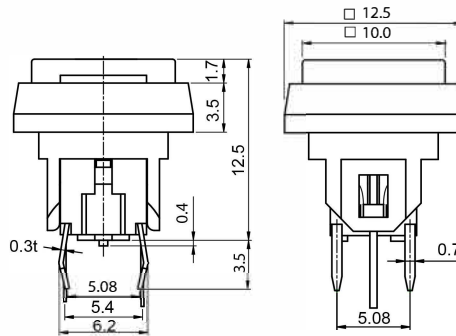

PB6171L(Metal) PB6271L(Rubber)

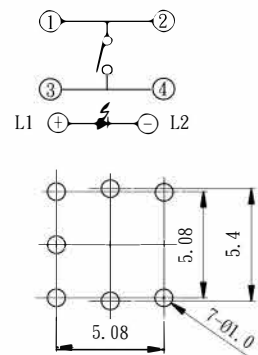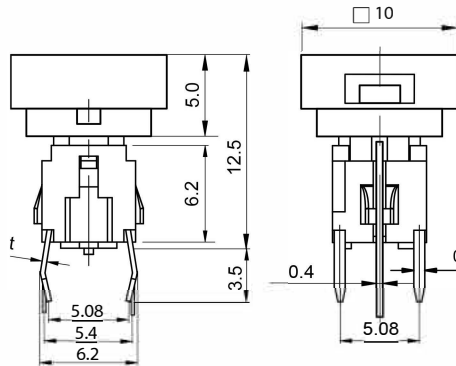

PB6172ML(Metal) PB6272ML(Rubber)

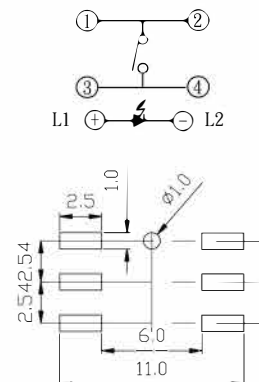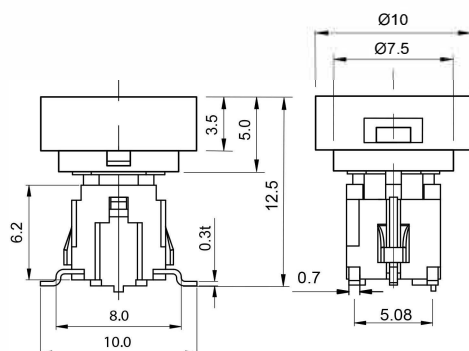

Unit: mm

P.C.B Layout

