

RJS-19L(A)-TOG SERIES

METAL TOGGLE SWITCH



Anti Vandal Toggle Switch

Features & Benefits

- Simple and reliable operation
- Ring LED illumination
- IP67 rated
- Soldered wire leads (500mm long) optional

Specifications

Electrical Rating	10A 250VAC
Insulation Resistance	≥100MΩ Max
Dielectric Strength	2,000VAC
Contact Resistance	≤50mΩ Max
Electrical Life	6,000 Cycles
Mechanical Life	200,000 Cycles
Operating Temperature	-20°C to 55° C
Moisture Protection	IP67
Actuation Force	4N
Panel Thickness	1-10mm
Mounting Nut Torque	5-14Nm

Part Number

RJS - 19 Blank Blank - TOG - - R - - BS - 3.3V - W - L

19 19mm
22 22mm
L (Ring LED)
A (Latching)
Blank (No LED)
Blank (Momentary)
2 - 1 Pole off - On
3 - 1 Pole off - (On)
C - 1 Pole On - Off - On
D - 1 Pole On - Off - (On)
J - 1 Pole (On) - Off - (On)
R (Ring)
Blank (Non-illuminated)
W - White
R - Red
O - Orange
G - Green
B - Blue
Y - Yellow
BS Brushed steel
BLK Black anodised
3.3V
6V
12V
24V
W Wire Leads (500mm long)
Blank (No wires)




Example - RJS-19L-TOG-2-R-R-BS-12V

RJS-19L(A)-TOG SERIES

METAL TOGGLE SWITCH



Anti Vandal Toggle Switch Ø 19mm

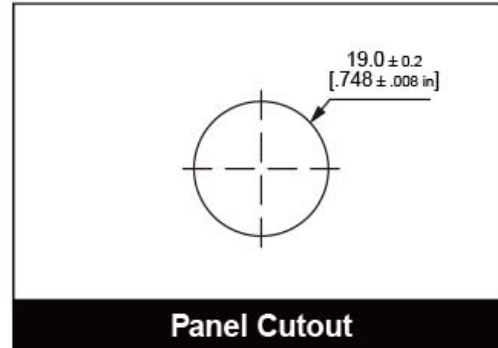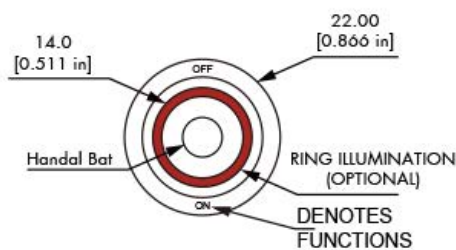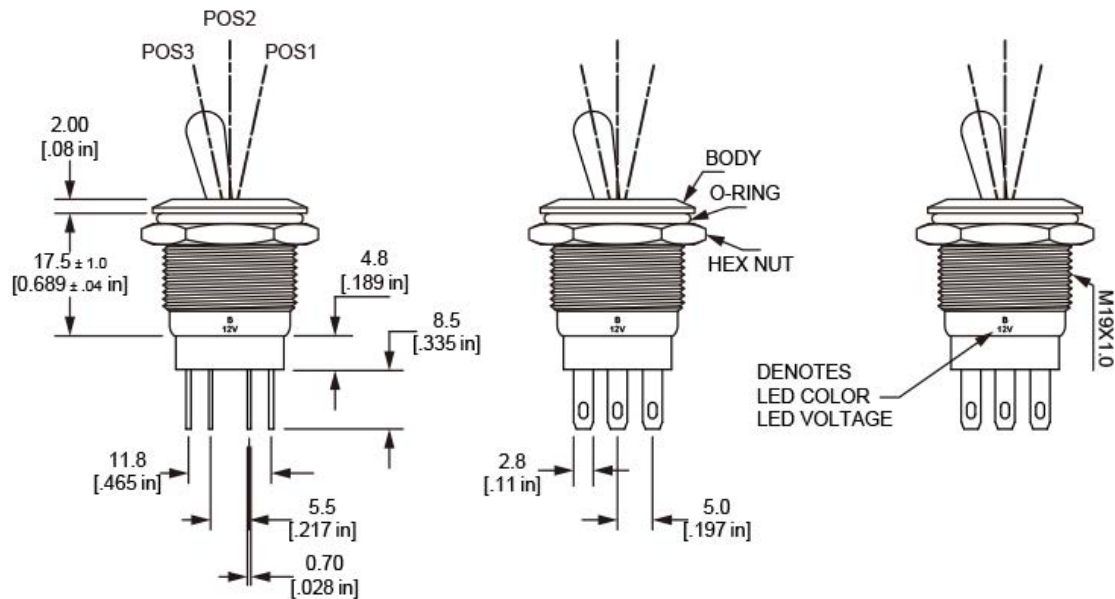

Switching Functions	POS.3	POS.2	POS.1
2 - OFF - ON	OFF	-	ON
3 - OFF - (ON)	OFF	-	(ON)
C - ON - OFF - ON	ON	OFF	ON
D - ON - OFF - (ON)	ON	OFF	(ON)
J - (ON) - OFF - (ON)	(ON)	OFF	(ON)

NOTES: 1. Lever do not stop at "-" position.
2. () = Denotes function is momentary