



The RJS D series safety limit switches conform to EN 50047 and have been developed to provide a range of options including plastic cases in various sizes, a choice of snap acting, slow break/make with 2 contact configurations and a choice of actuator heads. The RJS D series offers the option of rotating the head in 90degree increments before installation to allow ease of mounting. The limit switches can be used in other applications other than guard doors for example on moving machine beds, crane arms, lifts, elevators etc..

Operation of these limit switches is achieved by the sliding action of the guard or the other moving object deflecting the plunger or lever. For safety applications it is important that upon the actuation, the guard or other moving objects should not pass completely over the switch and allow the plunger or lever to return to its original position.

Category: [Limit Switches](#)

Attributes

Product Series	RJSD
Product Type	Limit Switch
Standards	EN60947-5-1, UL508, EN50047, EN1088
Approvals	cULus, TUV and CE marked for all applicable directives
Positive Opening Operation	NC Contact
Utilization Category	AC15 A600
Min Current	5V, 5mA, DC
Thermal Current (Ith)	10A
Rate Insulation Voltage	600V AC
Rated Impulse withstand Volt	2500V AC
Insulation Resistance	100M Ω min (DC 500V)
Contact Resistance	25 Ω max. (Initial)
Max Switching Speed	250mm/s
Max Switching Frequency	600 operation per hour
Enclosure Protection	IP67
Operating Temperature	Min -25 C (-18 F) Max 80 C (+176 F)
Mechanical Life Expectancy	1 x 10 cycles min
Electrically Life Expectancy	150,000 Cycles min

Illustrations and drawings shown on this short form are for guidance purposes only. Please see <https://www.riselectronics.com/image-drawings-disclaimer/> *3D files are not available on all products


Structure Description

Metal Lever Setting

Grooves which engage the lever every 18° are cut in the operation indicator disk to prevent the lever from slipping against the rotary shaft.

Cover

The cover, with a hinge on its lower part, can be opened by removing the screw of the cover, which ensures ease of maintenance and wiring.

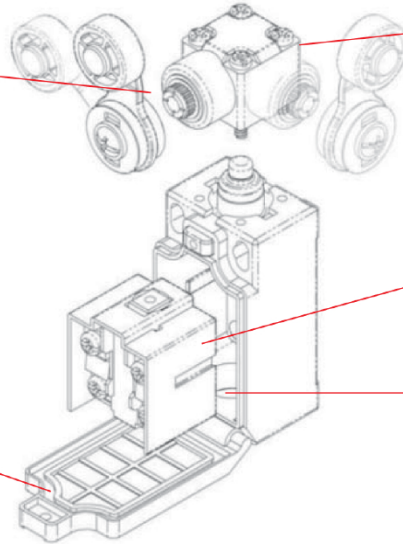

Hand

With roller lever models, the direction of the switch head can be varied to any of the four directions by loosening the roller lever switch screws at the four corners of the head.

Contact Block

Wide switch variations.
Snap-action: 1NC/1NO
Slow-action: 1NC/1NO, 2NC

Conduit

Wide switch variations.
PG13.5 PG11
M16 M20
1/2-14NPT

Part Number Breakdown

RJSD-□-□-□

1 2 3

1.THREAD DIMENSION OF LEAD EXIT

- 1: PG13.5(S)
- 2: 1/2NPT(C)
- 4: PG11(O)
- 5: M16(C)
- 6: M20(O)
- 7: Connector(C)

*(s):standard (o):option (c): customization

2.CONTACT TYPES

- 1: 1NC/1NO SLOW ACTION (BBM)(S)
- 2: 2NC SLOW ACTION(O)
- 3: 1NC/1NO SNAP ACTION(C)
- 4: 2NC/1NO SLOW ACTION
- 5: 3NC SLOW ACTION

3.HEAD AND ACTUATOR

- 20: Roller arm type
- 21: Adjustable roller arm type (standard roller)
- 22: Adjustable roller arm type (Long arm type)
- 24: Thermoplastic end flexible rod type
- 241: Cat whisker type
- 242: Wobble stick type
- 25: Rod lever type
- 27: Adjustable roller arm type (Rubber roller)
- 271: Two-Way Adjustable Roller Arm Type (Rubber roller)
- 31: Push plunger type
- 32: Roller plunger type
- 62: Roller lever type
- 63: One-Way roller arm lever type

Please inquire about custom options with our sales team.

Illustrations and drawings shown on this short form are for guidance purposed only. Please see <https://www.rjselectronics.com/image-drawings-disclaimer/> *3D files are not available on all products

Contact Block Form

TYPE	CONTACT FORM	CONNECTOR PIN ARRANGEMENT	OPERATION DIAGRAMS
RJSD-□-1-□□	1NC/1NO(Slow action) (See Note 1)		 M12 Connector pin arrangement
RJSD-□-2-□□	2NC (Slow action) (See Note 2)		
RJSD-□-3-□□	1NC/1NO(Snap action) (See Note 1)		
RJSD-□-4-□□	3NC (Slow action)		No Connector TYPE
RJSD-□-5-□□	2NC/1NO(Slow action)		

Positive Opening Mechanism

1NC/1NO Contact (Snap action)


Conforms to EN60947-5-1 Positive Opening

If metal deposition between mating contacts occurs on the NC contact side, they can be pulled apart by the shearing force and tensile force generated when the safety cam or plunger engages the movable contact blade. When the safety cam or plunger is moved in the direction of the black arrow the Limit Switch releases.

1. When metal deposition occurs. 2. When contacts are being pulled apart. 3. When contacts are completely pulled apart.




1NC/1NO Contact (Slow action)

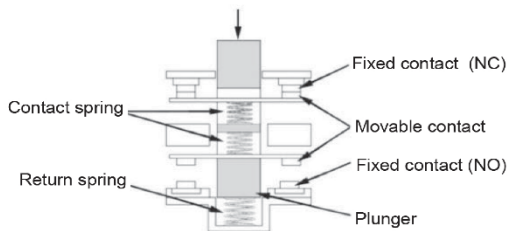

Only the NC contacts have a positive opening function. When metal deposition occurs, the contacts are separated from each other by pushing in the plunger.

2NC Contact (Slow action)

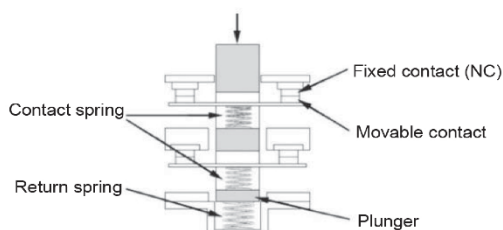

Both NC contacts incorporate a positive opening function. When metal deposition occurs, the contacts are separated from each other by pushing in the plunger.

Illustrations and drawings shown on this short form are for guidance purposes only. Please see <https://www.rjselectronics.com/image-drawings-disclaimer/> *3D files are not available on all products

RJSD-20


Operating Characteristics

Drawing

Roller Arm Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-20	Slow 1NC/1NO	30°	41°	6.5 N	45°	19.0 N	80°
RJSD-X-2-20	Slow 2NC	30°	-	6.5 N			
RJSD-X-3-20	Snap 1NC/1NO	28°	-	5.3 N			
RJSD-X-4-20	Slow 2NC/1NO	30°	41°	6.5 N			
RJSD-X-5-20	Slow 3NC	30°	-	6.5 N			

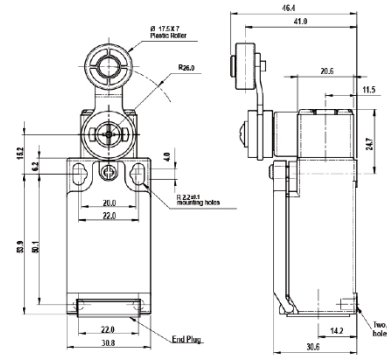

RJSD-21

Operating Characteristics


Drawing

Adjustable Roller Arm Type
(Standard arm)



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-21	Slow 1NC/1NO	30°	41°	6.5 N	45°	19.0 N	80°
RJSD-X-2-21	Slow 2NC	30°	-	6.5 N			
RJSD-X-3-21	Snap 1NC/1NO	28°	-	5.3 N			
RJSD-X-4-21	Slow 2NC/1NO	30°	41°	6.5 N			
RJSD-X-5-21	Slow 3NC	30°	-	6.5 N			

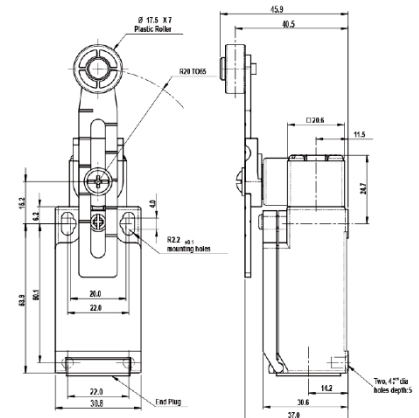

RJSD-22

Operating Characteristics


Drawing

Adjustable Roller Arm Type
(Long arm)



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-22	Slow 1NC/1NO	30°	41°	5.2 N	45°	19.0 N	80°
RJSD-X-2-22	Slow 2NC	30°	-	5.2 N			
RJSD-X-3-22	Snap 1NC/1NO	28°	-	4.5 N			
RJSD-X-4-22	Slow 2NC/1NO	30°	41°	5.2 N			
RJSD-X-5-22	Slow 3NC	30°	-	5.2 N			

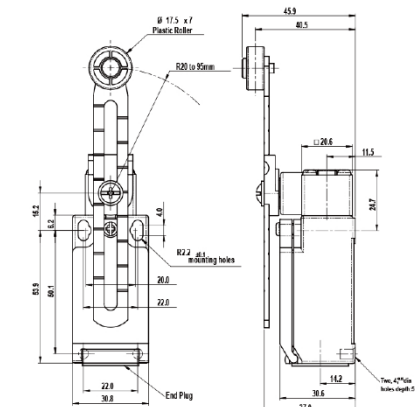

RJSD-24


Operating Characteristics

Drawing

Thermoplastic End Flexible Rod



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)
RJSD-X-2-24	Slow 2NC	12°	-	6.5 N
RJSD-X-3-24	Snap 1NC/1NO	12°	-	5.3 N
RJSD-X-5-24	Slow 3NC	12°	-	6.5 N

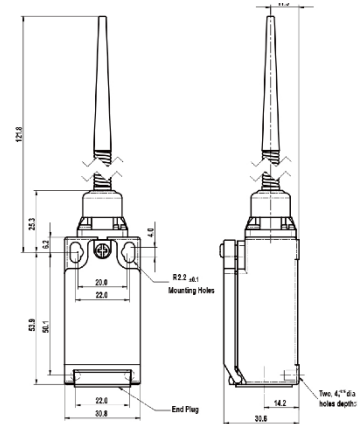

RJSD-241


Operating Characteristics

Drawing

Cat Whisker Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)
RJSD-X-2-241	Slow 2NC	12°	-	6.5 N
RJSD-X-3-241	Snap 1NC/1NO	12°	-	5.3 N
RJSD-X-5-241	Slow 3NC	12°	-	6.5 N

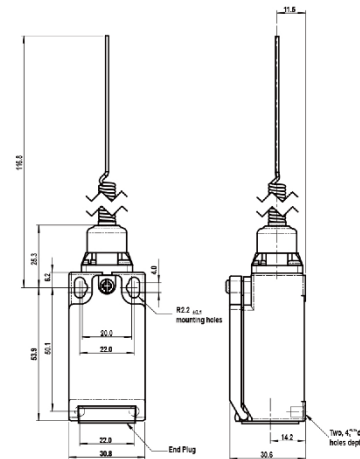

RJSD-242


Operating Characteristics

Drawing

Wobble Stick Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)
RJSD-X-2-242	Slow 2NC	12°	-	5.2 N
RJSD-X-3-242	Snap 1NC/1NO	12°	-	4.5 N
RJSD-X-5-242	Slow 3NC	12°	-	5.2 N

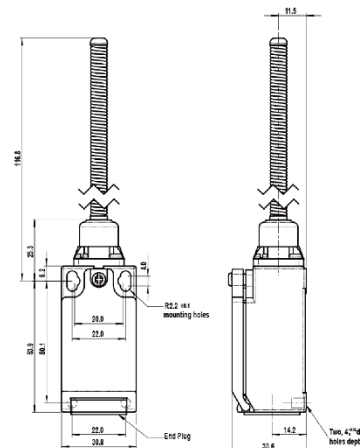

RJSD | LIMIT SWITCH SERIES

RJSD-27

Operating Characteristics


Drawing

Adjustable Roller Arm Type (Rubber roller)



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-27	Slow 1NC/1NO	30°	41°	5.2 N	45°	19.0 N	80°
RJSD-X-2-27	Slow 2NC	30°	-	5.2 N			
RJSD-X-3-27	Snap 1NC/1NO	28°	-	4.5 N			
RJSD-X-4-27	Slow 2NC/1NO	30°	41°	5.2 N			
RJSD-X-5-27	Slow 3NC	30°	-	5.2 N			

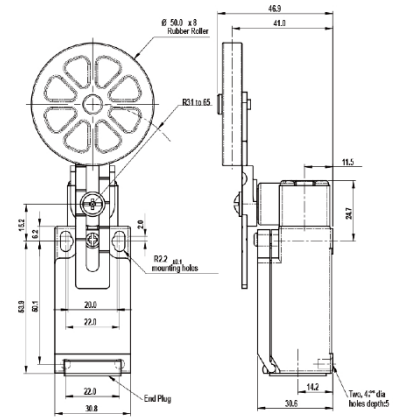

RJSD-271

Operating Characteristics


Drawing

Two-Way Adjustable Roller Arm Type (Rubber roller)



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-271	Slow 1NC/1NO	30°	41°	5.2 N	45°	19.0 N	80°
RJSD-X-2-271	Slow 2NC	30°	-	5.2 N			
RJSD-X-3-271	Snap 1NC/1NO	28°	-	4.5 N			
RJSD-X-4-271	Slow 2NC/1NO	30°	41°	5.2 N			
RJSD-X-5-271	Slow 3NC	30°	-	5.2 N			

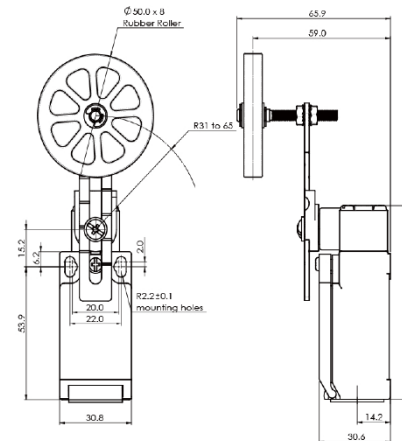

RJSD-25

Operating Characteristics


Drawing

Rod Lever Type



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-25	Slow 1NC/1NO	30°	41°	1.8 N	45°	19.0 N	80°
RJSD-X-2-25	Slow 2NC	30°	-	1.8 N			
RJSD-X-3-25	Snap 1NC/1NO	28°	-	1.9 N			
RJSD-X-4-25	Slow 2NC/1NO	30°	41°	1.8 N			
RJSD-X-5-25	Slow 3NC	30°	-	1.8 N			

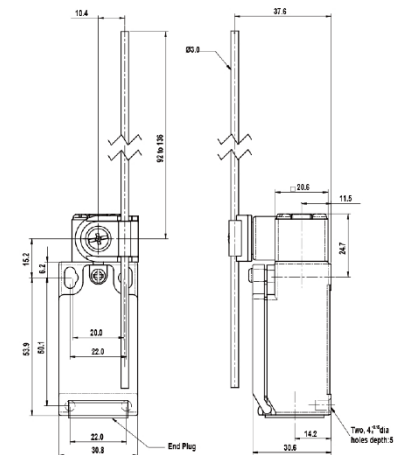

RJSD-31


Operating Characteristics

Drawing

Push Plunger Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-31	Slow 1NC/1NO	2.2 mm	3.0	7.26 N	3.2 mm	19.0 N	6.0 mm
RJSD-X-2-31	Slow 2NC	2.2 mm	-	7.42 N			
RJSD-X-3-31	Snap 1NC/1NO	1.9 mm	-	6.71 N			
RJSD-X-4-31	Slow 2NC/1NO	2.2 mm	3.0	7.26 N			
RJSD-X-5-31	Slow 3NC	2.2 mm	-	7.42 N			

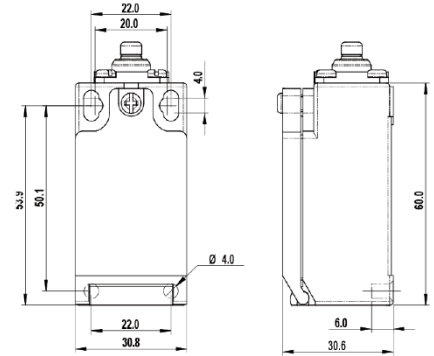

RJSD-32


Operating Characteristics

Drawing

Roller Plunger Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-32	Slow 1NC/1NO	2.2 mm	3.0	7.26 N	3.2 mm	19.0 N	6.0 mm
RJSD-X-2-32	Slow 2NC	2.2 mm	-	7.42 N			
RJSD-X-3-32	Snap 1NC/1NO	1.9 mm	-	6.71 N			
RJSD-X-4-32	Slow 2NC/1NO	2.2 mm	3.0	7.26 N			
RJSD-X-5-32	Slow 3NC	2.2 mm	-	7.42 N			

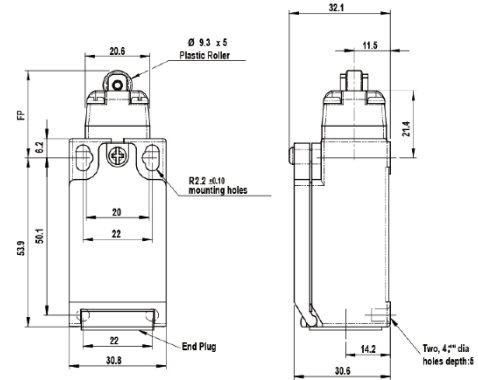

RJSD-62


Operating Characteristics

Drawing

Roller Lever Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-62	Slow 1NC/1NO	3.0 mm	4.5 mm	5.21 N	5.7 mm	19.0 N	5.2 mm
RJSD-X-2-62	Slow 2NC	3.0 mm	-	5.26 N			
RJSD-X-3-62	Snap 1NC/1NO	2.9 mm	-	4.74 N			
RJSD-X-4-62	Slow 2NC/1NO	3.0 mm	4.5 mm	5.21 N			
RJSD-X-5-62	Slow 3NC	3.0 mm	-	5.26 N			

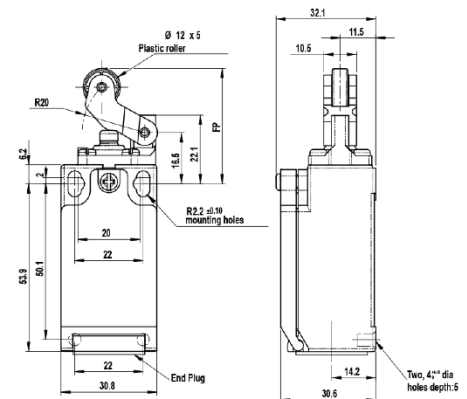

RJSD-63


Operating Characteristics

Drawing

One-Way Roller Arm Lever Type




Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSD-X-1-63	Slow 1NC/1NO	4.0 mm	6.0 mm	6.37 N	4.6 mm	19.0 N	9.8 mm
RJSD-X-2-63	Slow 2NC	4.0 mm	-	6.98 N			
RJSD-X-3-63	Snap 1NC/1NO	3.6 mm	-	5.76 N			
RJSD-X-4-63	Slow 2NC/1NO	4.0 mm	6.0 mm	6.37 N			
RJSD-X-5-63	Slow 3NC	4.0 mm	-	6.98 N			

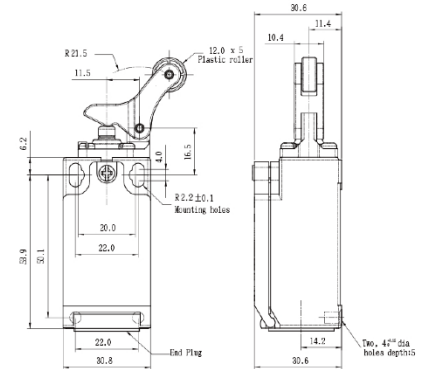

Dimensions



Unit: mm

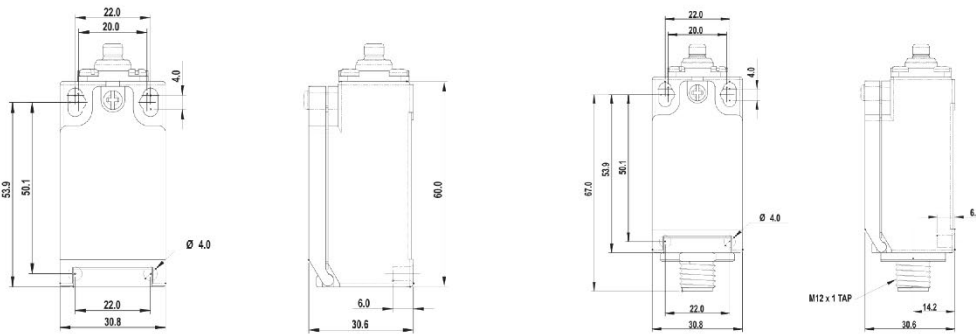

Operating examples



Typical Applications

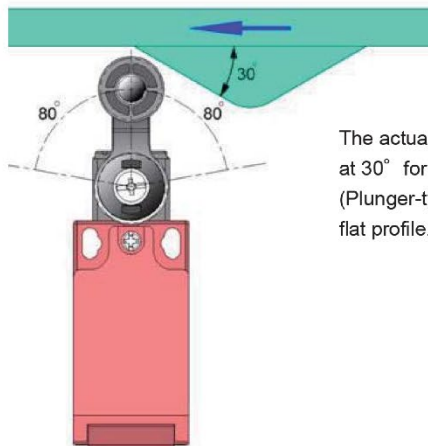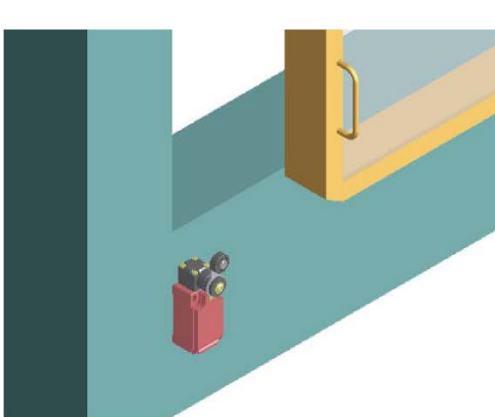

The actuating cam should be profiled at 30° for optimum operation. (Plunger-type switches operate from a flat profile.)

A14

Design, specifications are subject to change without notice.