

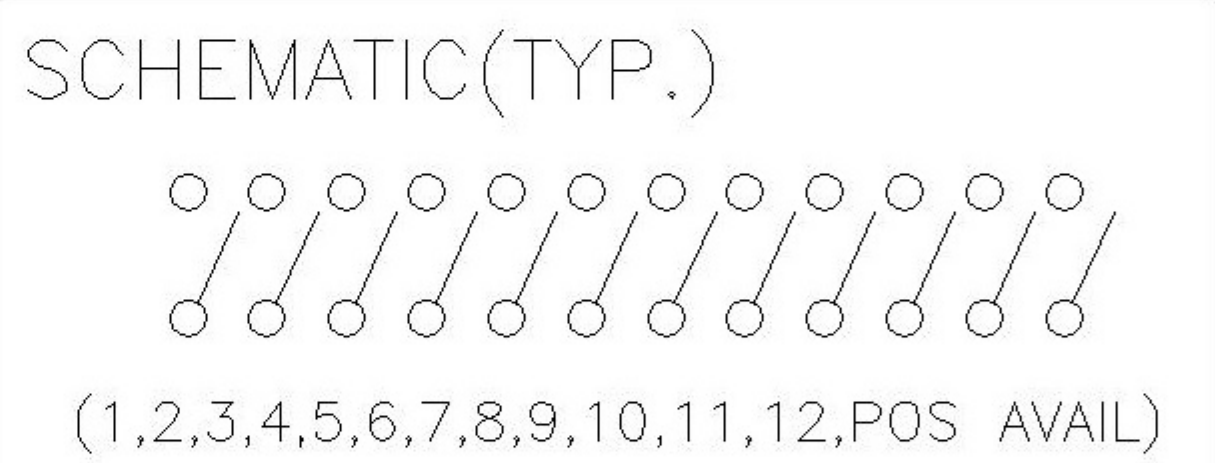
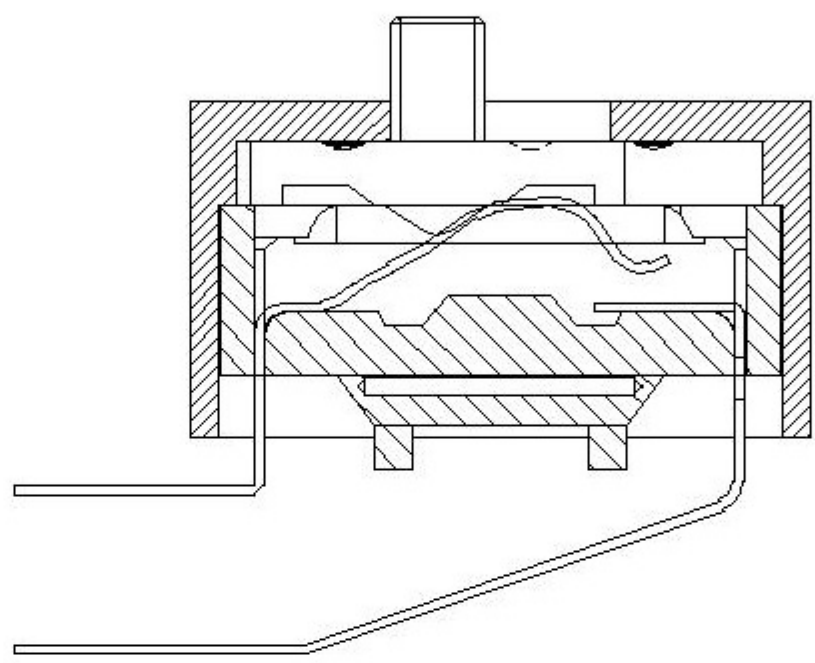


**RJS-DA SERIES**  
DIP SWITCH

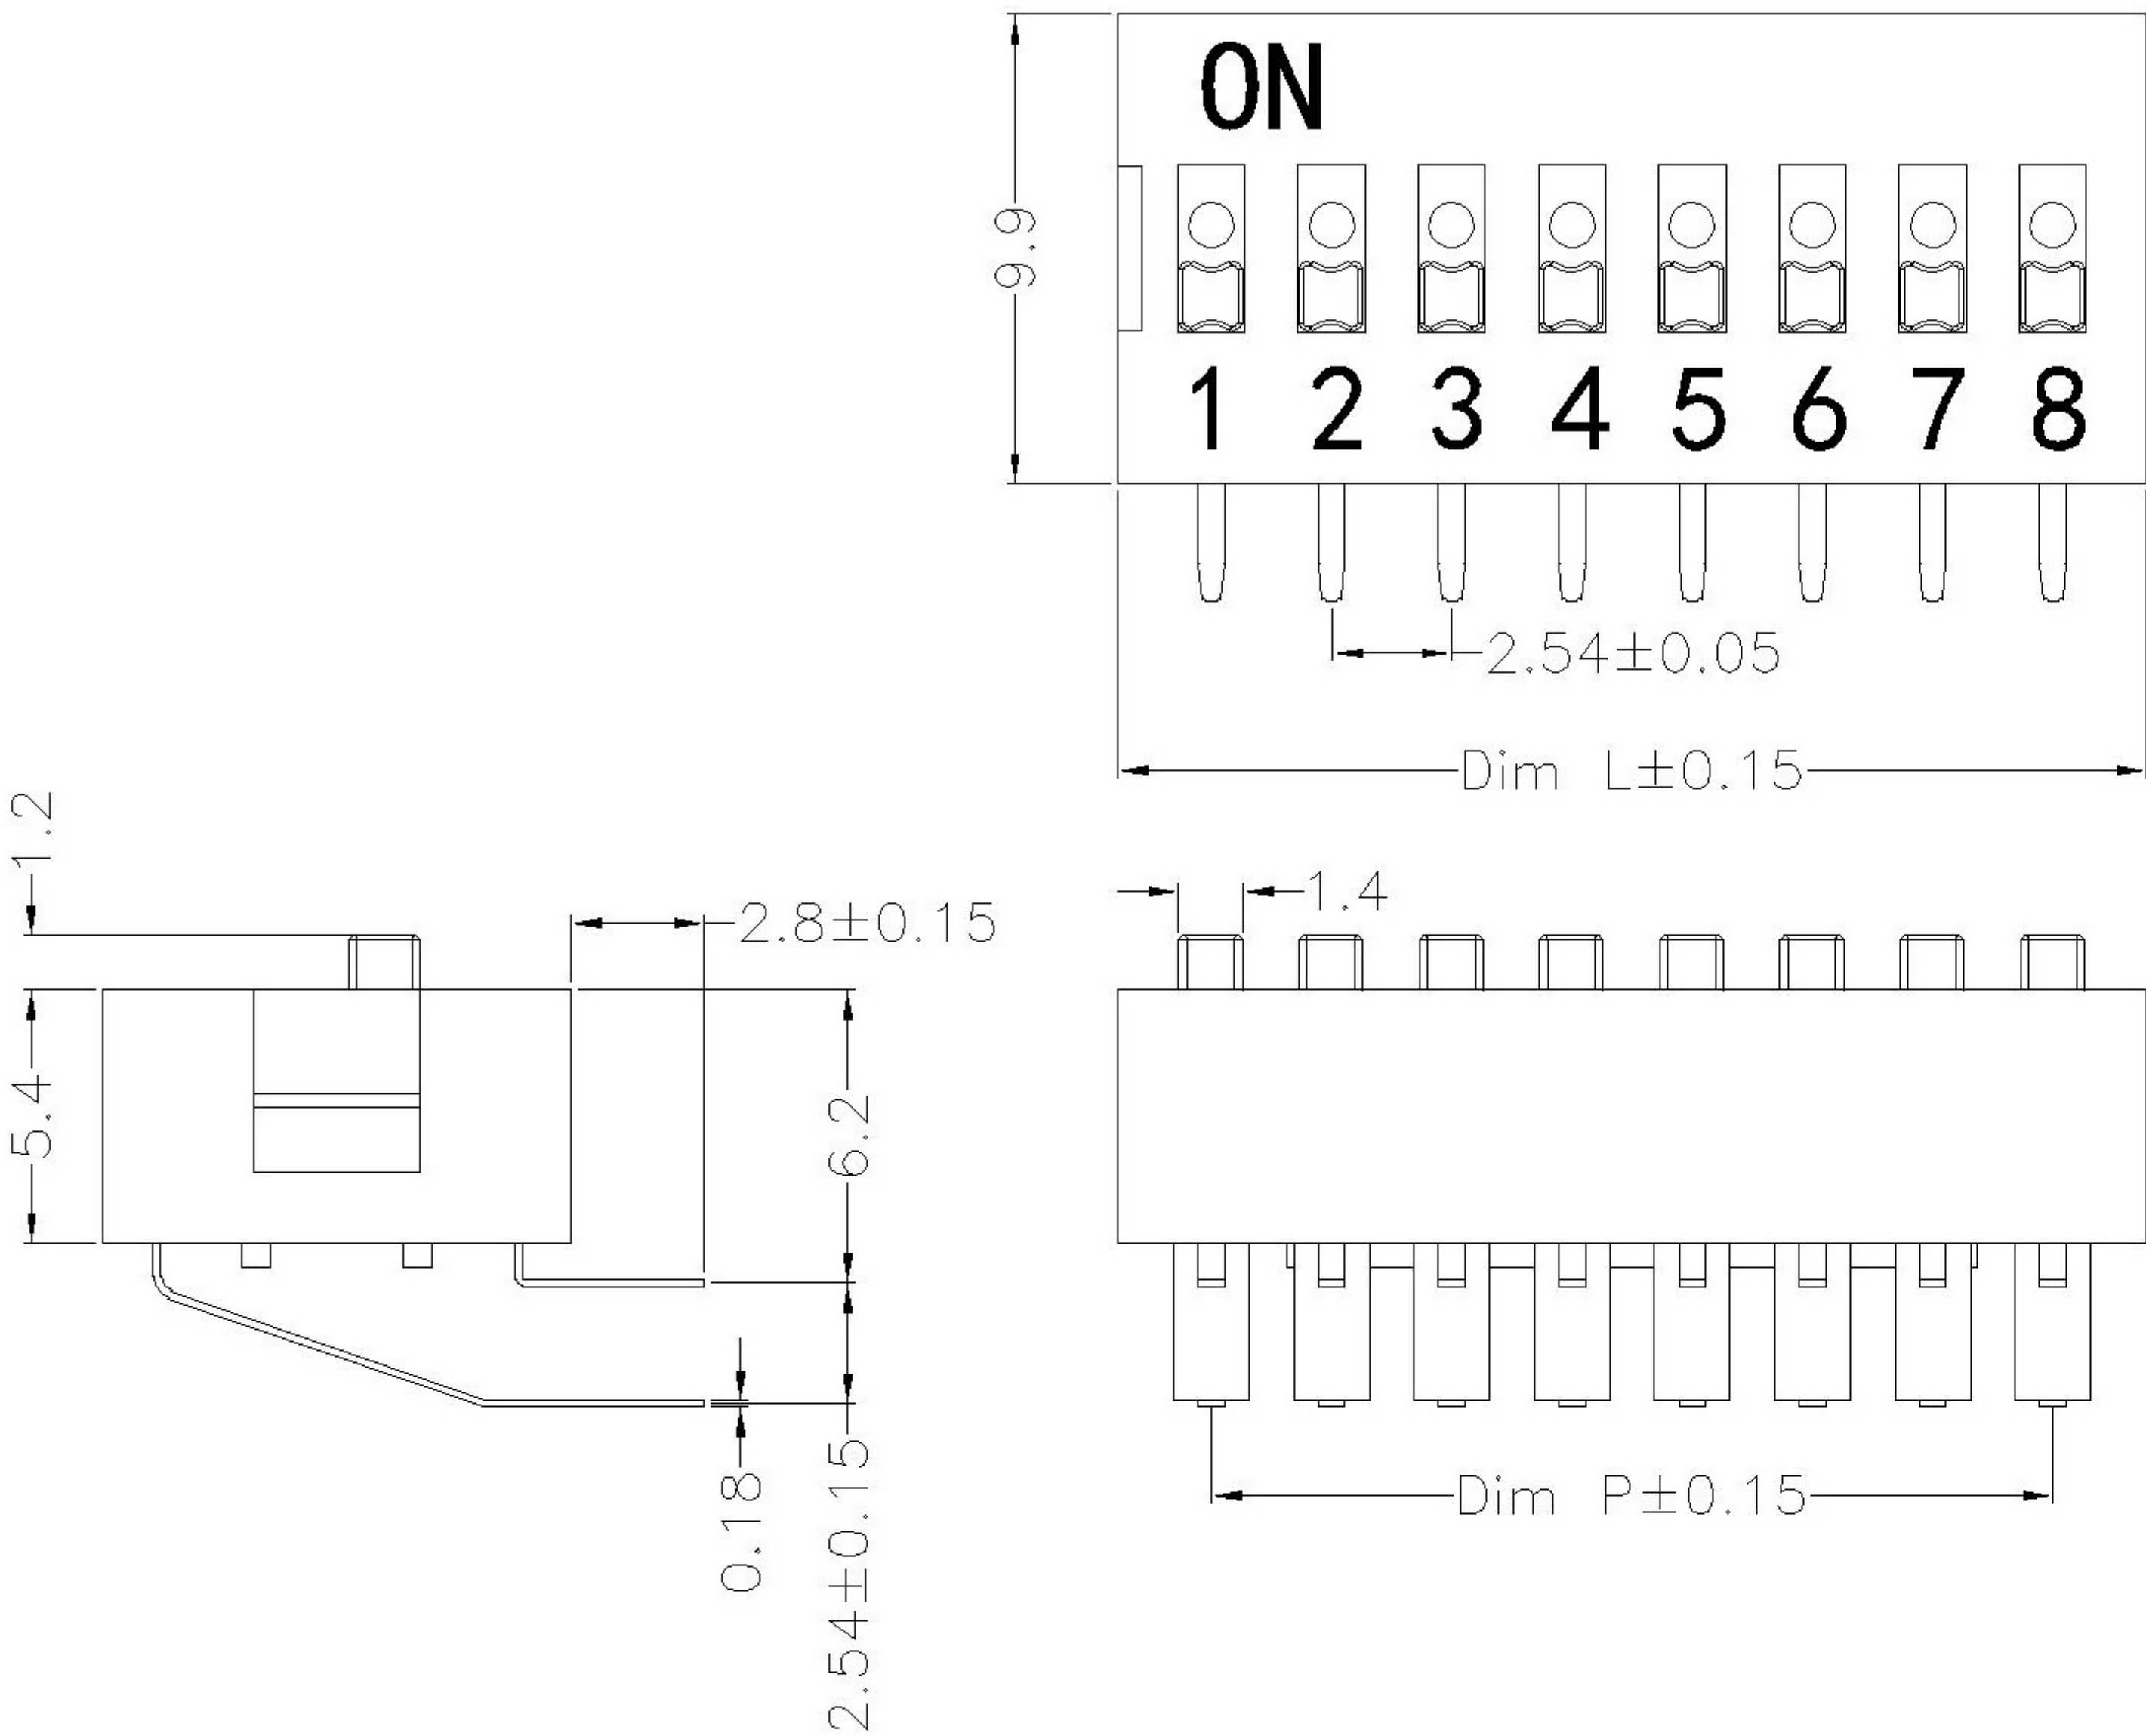

Poles	Dim P	Dim L
1P	—	3.96
2P	2.54	6.50
3P	5.08	9.04
4P	7.62	11.58
5P	10.16	14.12
6P	12.70	16.66
7P	15.24	19.20
8P	17.78	21.74
9P	20.32	24.28
10P	22.86	26.82
11P	25.40	29.36
12P	27.94	31.90

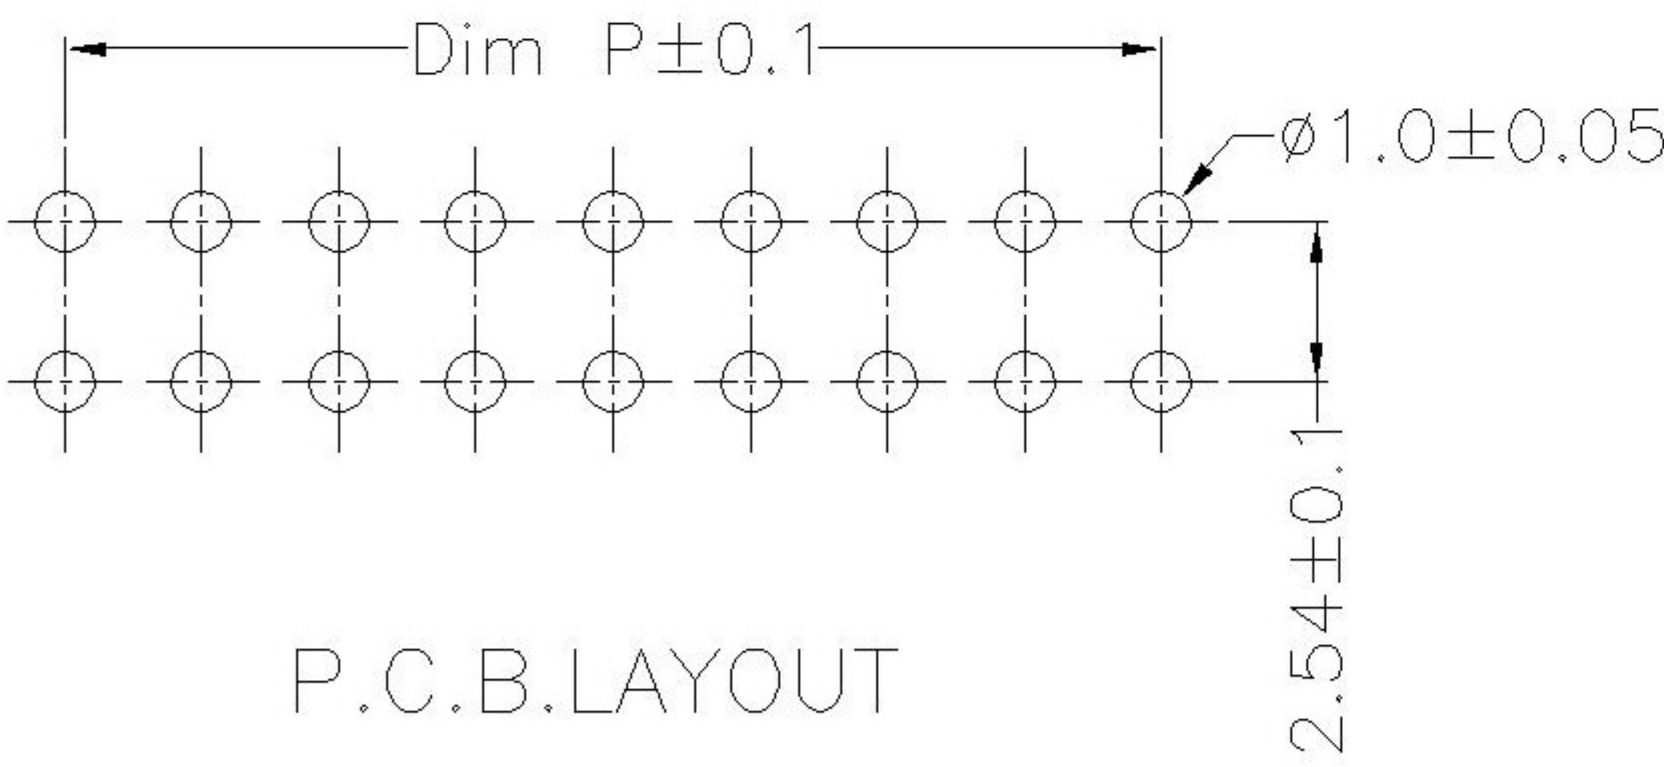

- Note:**
- I. MECHANICAL**
- 1、 Operation Force :8N Max
  - 2、 Operation Temp : -25℃~+70℃
  - 3、 Storage Temp : -40℃~+85℃
  - 4、 Stroke :2mm
- II. ELECTRICAL**
- 1、 Electrical Life:2000 operations cycles per switch 24VDC, 25mA
  - 2、 Non-Switching Rating : 100mA, 50VDC
  - 3、 Switching rating:25mA, 24VDC
  - 4、 Contact resistance : (a) 500 mΩ max. at initial(b) 100 mΩmin . after life test
  - 5、 Insulation Resistance : 100MΩ Min, AT 500VDC
  - 6、 Dielectric Strength : 500VAC / 1 minute
  - 7、 Capacitance : 5pF max
  - 8、 Circuit : Single pole double throw
- III. SOLDERING AND CLEANING PROCESSES**
- 1、 Keep all switch contacts in their “OFF” position for all operations
  - 2、 WAV SOLDERING : Recommended Solder Temperature at 240℃ max. 20 seconds
  - 3、 HAND SOLDERING : Use a soldering iron of 30 watts, controlled at 270℃ approximately 2 seconds while applying solder
  - 4、 CLEANING PROCESS:When vapor methods are used do not subject the switch to solvents at temperature above 125° F (51℃)