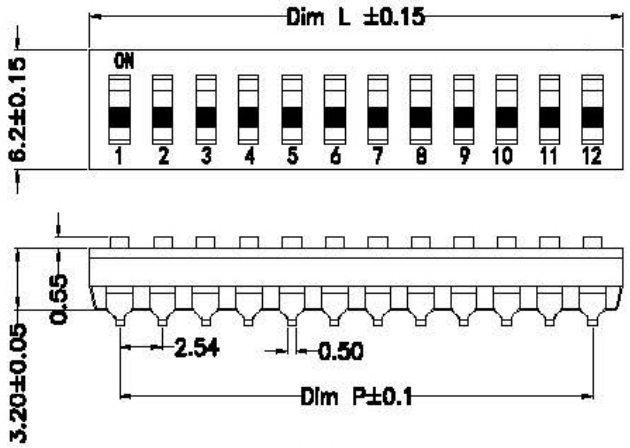

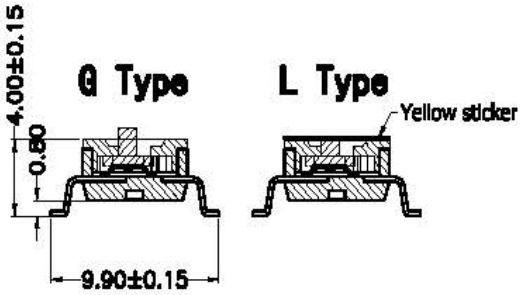

SCHEMATIC(TYP.)



(1,2,3,4,5,6,7,8,9,10,11,12,POS AVAIL)

Poles	Dim P	Dim L
1P	---	3.54
2P	2.54	6.08
3P	5.08	8.62
4P	7.62	11.16
5P	10.16	13.70
6P	12.70	16.24
7P	15.24	18.78
8P	17.78	21.32
9P	20.32	23.86
10P	22.86	26.40
11P	25.40	28.94
12P	27.94	31.48

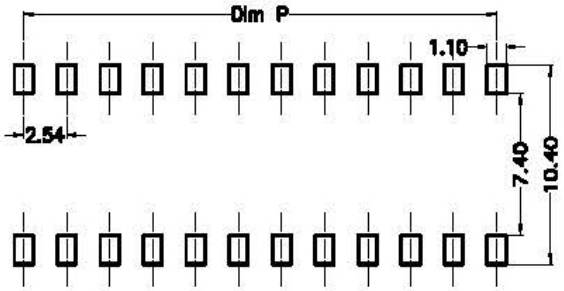

P. C. B. LAYOUT

Specifications

- Contact Rating: Switching.....25mA,24VDC; Non-Switching.....100mA,50VDC
- Contact Resistance: Initial.....50m Ω/Max; After Reliability Test..... 100m Ω/Max
- Insulation Resistance ..... 100MΩ/Min. at 500 VDC
- Dielectric Strength 500VAC/1minute
- Operating Force ..... 800g /max
- Travel 0.9mm
- Mechanical Life .....5,000 cycles (Min.)
- Electrical Life .....2,000 cycles
- Operating Temperature ..... -20℃~+70℃
- Storage Temperature ..... -40℃~+85℃

HOW TO ORDER

DM – XX – X XX – XXX – XXX

- DM: MODEL
- XX: No.of poles: 1~12P
- X: Actuator Type G=Raise Actuator L=Flat Actuator
- XX: 00:Tube TR:Tape&Reel
- XXX: Customer Request

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.5	X°.	±5°
.X	±0.3	.X°	±3°
.XX	±0.1	.XX°	±1°

DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.			

PROJECTION		TITLE	
UNITS	mm		
SHEET SIZE	A4	SERIES	

RJS Electronics

RJS-DM-R01