


RJS-EX1 SERIES

CE RoHS


Installation Diameter: 22mm
 Contact Rating: 3A/125-250VAC
 Output Contact: NO/NC/COM
 Mechanical Life: 500,000 Tests
 Button Colour: Green Red

Operating Temperature: -20°C~+55°C(14-131F)
 Suitable Humidity: 0-95%(relative humidity)
 Panel : 1.7mm Thick 304 Stainless Steel (Wire Drawing)

Optional Pattern:

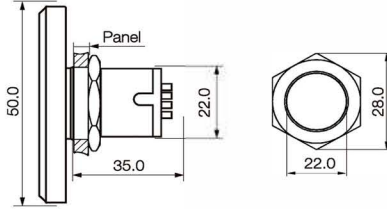

Unit: mm



RJS-EX1-70S-G-E



RJS-EX1-70S-G-P



RJS-EX1-70S-G-H



RJS-EX1-70S-G-K



1.7mm Thick 304 Stainless Steel (Wire Drawing)



RJS-EX1-86S-G-E



RJS-EX1-86S-G-P



RJS-EX1-86S-G-H




RJS-EX1-86S-G-K


Installation Diameter: 22mm
 Contact Rating: 3A/125-250VAC
 Output Contact: NO/NC/COM
 Mechanical Life: 500,000 Tests
 Button Colour: Green Red

Operating Temperature: -20°C~+55°C(14-131F)
 Suitable Humidity: 0-95%(relative humidity)
 Panel : 4mm Thick Aluminium alloy (CNC)

Optional Pattern:

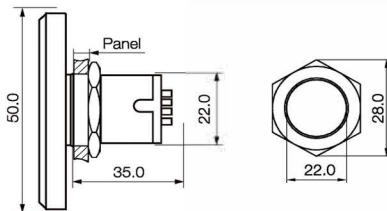

Unit: mm



RJS-EX1-70A-G-E



RJS-EX1-70A-G-P



RJS-EX1-70A-G-H



RJS-EX1-70A-G-K



4mm Thick Aluminium alloy (CNC)



RJS-EX1-86A-G-E



RJS-EX1-86A-G-P



RJS-EX1-86A-G-H



RJS-EX1-86A-G-K



Selector Guide

RJS - EX1 - **70 S** - **G** - **E**

