


RJS-TLSW19 SERIES

INFRARED TOUCHLESS SWITCH

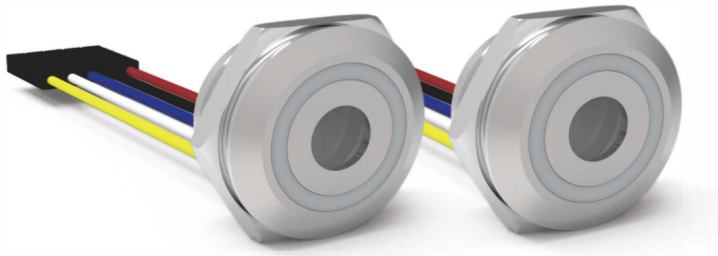


How to Order

| Corresponding number | RJS-TLSW19   |                                                                                                        |
|----------------------|--------------|--------------------------------------------------------------------------------------------------------|
| 1                    | Install size | 19mm                                                                                                   |
| 2                    | Action style | Momentary      Latching                                                                                |
| 3                    | Shape of top | Ring Illumination                                                                                      |
| 4                    | Contact type | 1NO                                                                                                    |
| 5                    | Touch switch | TS                                                                                                     |
| 6                    | Color        | <span>R</span> Red <span>B</span> Blue <span>Y</span> Yellow <span>G</span> Green <span>W</span> White |
| 7                    | Voltage      | 5VDC    12VDC    24VDC    36VDC                                                                        |
| 8                    | Material     | Stainless steel                                                                                        |

Technical Parameter

|                        |                                                                               |
|------------------------|-------------------------------------------------------------------------------|
| Rated working voltage  | 5V~36VDC                                                                      |
| Output working current | 150mA Max                                                                     |
| Output method          | PNP/NPN                                                                       |
| Output type            |                                                                               |
| Protection level       | IEC IP67                                                                      |
| Operating temperature  | -25℃~+55℃ (No icing)                                                          |
| Storage temperature    | -40℃~+70℃ (No icing)                                                          |
| Operating temperature  | 40~85%RH (No condensation)                                                    |
| Material               | Base: black alumina; Light-emitting part: polycarbonate; Installation nut: PA |

Dimensions

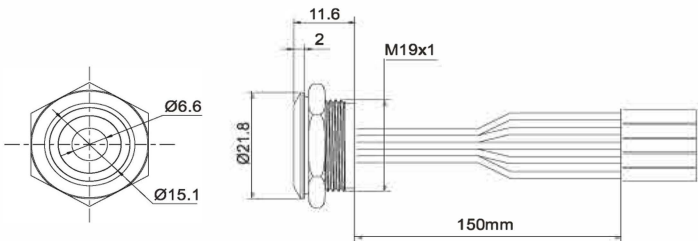

Wiring diagram

