


RJS102P-16 SERIES

METAL SWITCH



Appearance	Function	Contact	Part Number	Material	Colour	Rated Voltage / Current
	Momentary / Latching	1NO1NC	RJS102P-16(A)-F~67Q	Brushed Steel Stainless Steel Black Anodised Aluminium	R Red G Green Y Yellow W White B Blue O Orange	AC:250V/5A LED AC/DC: 1.8-250V <20Ma
	Momentary / Latching	1NO1NC	RJS102P-16(A)-H~67Q			

■ Drawing

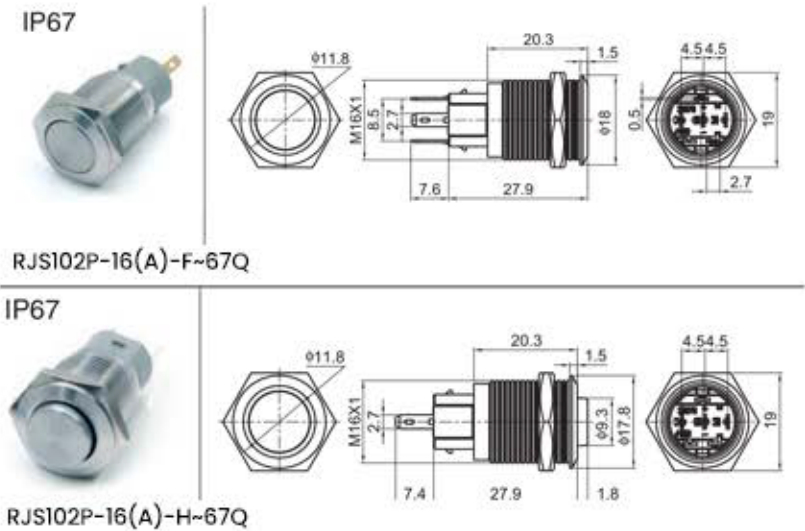


RJS102P-16 SERIES

METAL SWITCH



Contact parameters	Contact configuration	1NO1NC
	Contact	Silver alloy,Pin terminal
Color/voltage	Optional color	R O Y G B W
	Optional voltage	0V 5V 12V 24V
Other parameters	Mechanical life	200,000cycles
	Electrical life	50,000cycles
	LED life	40,000hour
	Terminal Type	Pin Terminal(2.8X0.5)
	Contact resistance	≤50mΩ
	Insulation resistance	≥1000mΩ
	Dielectric Strength	2000VAC
	Operation Temperature	-20°C~+55°C

SELECTOR GUIDE

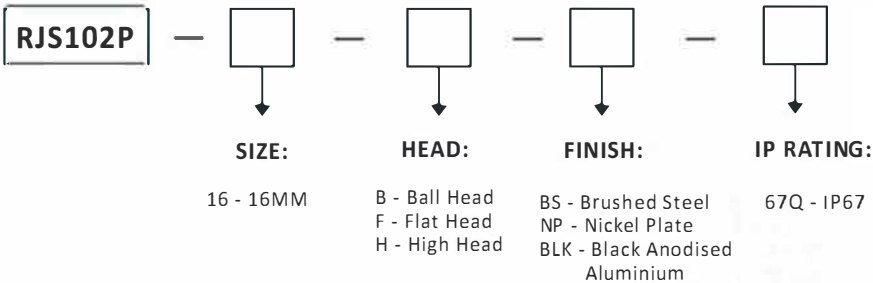

Wiring available subject to MOQ
Contact us for more information!
+44 (0) 1234 213600 | sales@rjselectronics.com

