


RJS203-40L SERIES

METAL PUSH BUTTON SWITCH



Install Size



Switching Operation

Type	Sign	Diagram	Contact type	Terminal Description
No.2				

Explanation: Using two terminals, double-break and slow-motion contact.
Y type NC switch can be made to order for individual product, pls check the product description.

LED Ratings

Lamp Type	LED lamp(AC/DC)
Rated Voltage	3V,6V,12V,24V,36V,48V,110V,220VAC/DC
Rated Current	15mA - 20mA
LED Colour	R G Y O B W
Life	40000 hours(Reference)
Lamp Circuit diagram	

Using AC/DC LED lamp, the terminals have no difference of anode and cathode

DC LED and other voltage can be made to order.

Rated Parameters

Working voltage		24V	110V	220V
Contact Parameter	AC (50/60Hz)	—	1.0A	0.5A
		—	0.7A	0.5A
	DC	1.0A	0.2A	—
		0.7A	0.1A	—

Contact Ratings

Rated insulation voltage			250				
Heating current Ith			3A				
Rated voltage			Temperature does not exceed the maximum allowed current				
Rated current	AC 50/60Hz	Resistive load	12V	24V	110V	220V	
		Inductive load	—	—	5A	3A	
	DC	Resistive load	5A	5A	1A	0.5A	
		Inductive load	2A	2A	0.2A	0.1A	
		Contact material		Silver Plated Gold			


RJS203-40L SERIES

METAL PUSH BUTTON SWITCH




Appearance	Shape of top	Illuminated type	Operation	Contact	Model	Colour	Voltage	Crust material
	High ring round	With LED	Momentary	2NO+2NC	RJS203-40L-H-R-67J	Red Green Blue White Yellow Orange	24VDC 12VDC 6.3VDC 110VAC 220VAC	BS: Stainless Steel
	Flat ring round	With LED	Momentary	2NO+2NC	RJS203-40L-F-R-67J			
	Flat dot round	With LED	Momentary	2NO+2NC	RJS203-40L-F-D-67J			
	Domed ring round	With LED	Momentary	2NO+2NC	RJS203-40L-B-R-67J			


RJS203-40L-H-R-67J

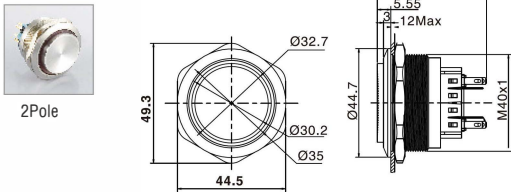


RJS203-40L-F-R-67J

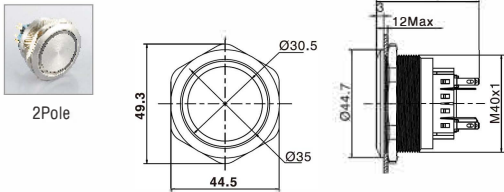

RJS203-40L-F-D-67J

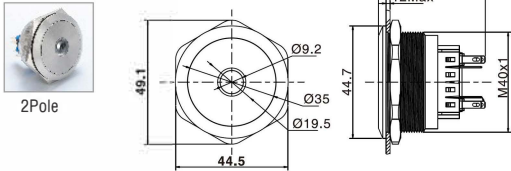

RJS203-40L-B-R-67J

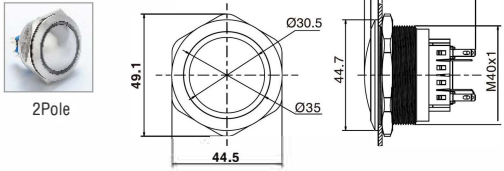

Wiring available subject to MOQ



RJS203-40L SERIES

METAL PUSH BUTTON SWITCH



How to Order

Corresponding number	R J S 0 3 - L (A) - H - R ~ 6 7 J								
	1 2 3 4 5 6 7 8 9								
1	Poles	1 / 2							
2	Size	22 / 25 / 30 / 40 mm							
3	Function	Momentary / Latching							
4	Shape of Top	Flat / High / Domed / Mushroom Head / Full-face illumination							
5	Illumination Type	Ring / Dot / Custom							
6	Colour	R B Y G W O							
7	Material	Stainless Steel / Black Anodised Aluminium / Other metal finishes *							
8	Voltage	24VDC 110VAC 12VDC 220VAC 6.3VDC							
9	IP Rating	IP65 / IP67							