

# RJSAS22E MUSHROOM EMERGENCY



## Specifications

Operating Temperature	-20~+55℃		
Operating Humidity	45~85%		
Store Temperature	-45~+80℃		
Store Humidity	95%RH		
Degree of Protection	IP65(IEC 60529) IP20(IEC 60529)		
Insulation Resistance	100MΩ ( 500V DC )		
Dielectric Strength	2,500VAC/1 2,000VAC/1		
Vibration Resistance	10~500Hz	0.35mm	50m/s <sup>2</sup>
	10~500Hz	0.35mm	50m/s <sup>2</sup>
	5~55Hz 30Hz	0.5mm 1.5mm	
Shock resistance	150 m/s <sup>2</sup> 1,000 m/s <sup>2</sup>		
	100 m/s <sup>2</sup> 1,000 m/s <sup>2</sup>		
Mechanical Life	250,000		
	5,000,000		
	1,000,000		
Electrical Life	250,000		
	100,000		


## Contact Ratings

		600V			
		10A			
		24V	120V	240V	380V
AC (50/60Hz)	(AC-12)	10A	10A	6A	2A
	(AC-15)	10A	6A	3A	1.9A
DC	(DC-12)	8A	2.2A	1.1A	-
	(DC-13)	4A	1.1A	0.55A	-

## LED Ratings

Unit type	Operating Voltage	Current consumption	Color code
LSED-6②	6V AC/DC	10mA(A, R, Y) 7mA(G, PW, S)	A : Amber G : Green PW : White R : Red S : Blue Y : Yellow
LSED-1②	12V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED-2②	24V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED-H②	110V AC/DC	5mA	
LSED-M3②	230/240V AC/DC	3mA	

## Combination mode:

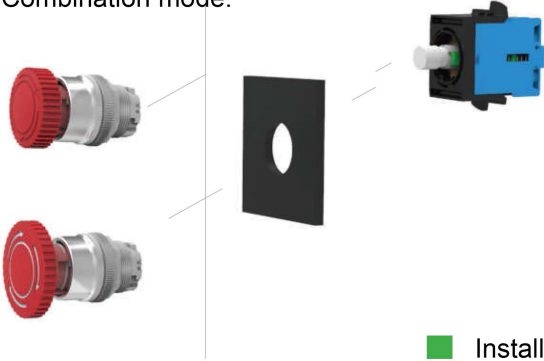

## How to order:

RJSAS22E \_

Mounting  
Size

Ø22

Operation  
Type

Momentary  
Maintained  
E-stop  
Small E-stop

Operation  
Characteristic

Round  
Flush with LED

Contact  
Structure

NO  
NC  
2NO  
NC  
NO+NC


Color

**R** Red  
**G** Green  
**Y** Yellow  
**W** White  
**B** Blue  
**A** Orange

Voltage

24VDC  
12VDC  
6.3VDC  
110VAC  
220VAC


## Installation size:



# RJSAS22E MUSHROOM EMERGENCY




## RJSAS22E Mushroom


Product appearance		Operation	Contact	Model	Colour
Ø32mm	Mushroom	Push-lock Turn Reset	1NC	RJSAS22E-X101	 Red
			2NC	RJSAS22E-X102	

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

## RJSAS22E Mushroom

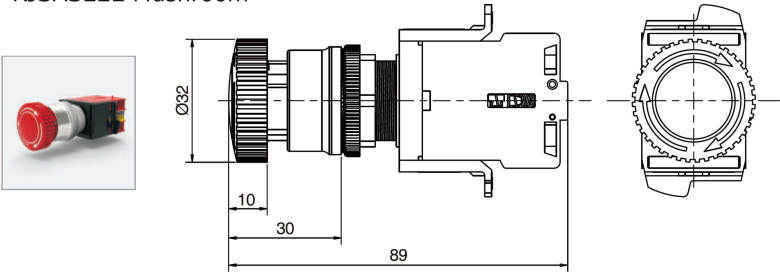


## RJSAS22E Mushroom - with LED Illumination

Product appearance		Operation	Contact	Model	Colour	Rated Voltage
Ø32mm	Mushroom	Push-lock Turn Reset	1NC	RJSAS22E-X701	 Red	24VDC 12VDC 6.3VDC 110VAC 220VAC
			2NC	RJSAS22E-X702		

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

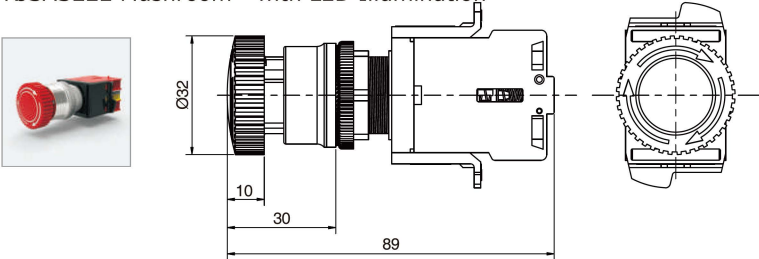

## RJSAS22E Mushroom - with LED Illumination




# RJSAS22E MUSHROOM EMERGENCY





## RJSAS22E Large Mushroom

Product appearance	Operation	Contact	Model	Colour
<div>Ø40mm Mushroom</div> 	Push-lock Turn Reset	1NC	RJSAS22E-8101	 红色/Red
		2NC	RJSAS22E-8102	

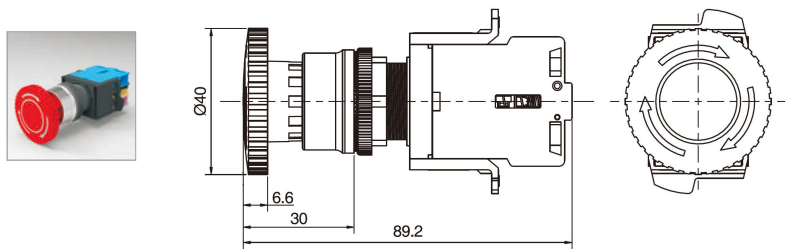When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.



## RJSAS22E Large Mushroom - with LED Illumination

Product appearance	Operation	Contact	Model	Colour	Rated Voltage
<div>Ø40mm Mushroom</div> 	Push-lock Turn Reset	1NC	RJSAS22E-8701	 Red	24VDC 12VDC 6.3VDC 110VAC 220VAC
		2NC	RJSAS22E-8702		

\*按钮按下后呈锁定状态，拉出或顺时针旋转复位。  
When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

