



■ Specifications

Operating Temperature	-20~+55℃		
Operating Humidity	45~85%		
Store Temperature	-45~+80℃		
Store Humidity	95%RH		
Degree of Protection	IP65(IEC 60529) IP20(IEC 60529)		
Insulation Resistance	100MΩ (500V DC)		
Dielectric Strength	2,500VAC/1 2,000VAC/1		
Vibration Resistance	10~500Hz	0.35mm	50m/s ²
	10~500Hz	0.35mm	50m/s ²
	5~55Hz 30Hz	0.5mm 1.5mm	
Shock resistance	150 m/s ² 1,000 m/s ²		
	100 m/s ² 1,000 m/s ²		
Mechanical Life	250,000		
	5,000,000		
	1,000,000		
	250,000		
	100,000		
	250,000 100 000		
Electrical Life	100,000		
	50,000		

■ Contact Ratings

Rated insulation voltage		600V			
Rated current		10A			
Rated voltage		24V	120V	240V	380V
AC (50/60Hz)	(AC-12)	10A	10A	6A	2A
	(AC-15)	10A	6A	3A	1.9A
DC	(DC-12)	8A	2.2A	1.1A	-
	(DC-13)	4A	1.1A	0.55A	-

■ How to Order

	—				
Mounting Size		Operation Type	Operation Characteristic	Contact Structure	Selection Code
Ø30		4: Selector (2P) 5: Selector (3P) 6: Key Switch (2P) 7: Key Switch (3P)	1: Round	10: NO 1: NC 20: 2NO 2: NC 11: NO+NC	2: 2 position Maintained 3: 3 position Maintained 0: 2 position Momentary 7: 3 position Left Momentary, Right Maintained 6: 3 position Right Momentary, Left Maintained 1: 3 position Momentary

Keylock Switch


Product appearance	Positions	Operation	Contact	Model
Key Switches 		Momentary	1NO	RJSAS30E -6110-0
			1NC	RJSAS30E -6101-0
			2NO	RJSAS30E -6120-0
			2NC	RJSAS30E -6102-0
			1NO+1NC	RJSAS30E -6111-0
		Maintained	1NO	RJSAS30E -6110-2
			1NC	RJSAS30E -6101-2
			2NO	RJSAS30E -6120-2
			2NC	RJSAS30E -6102-2
			1NO+1NC	RJSAS30E -6111-2
		Maintained	2NO	RJSAS30E -7120-3
			2NC	RJSAS30E -7102-3
			1NO+1NC	RJSAS30E -7111-3

Keylock Positions


/Sort	Reset Style				Key out Positon							
	Maintained	Momentary										
3Positon												
Code	2	0			A	B		D				
3Positon												
Code	3	7	6	1	A	B	C	D	E	F	G	

Selector/Key basic rotation angle 90°

Combination

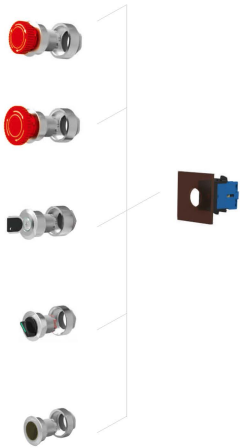

Drawing

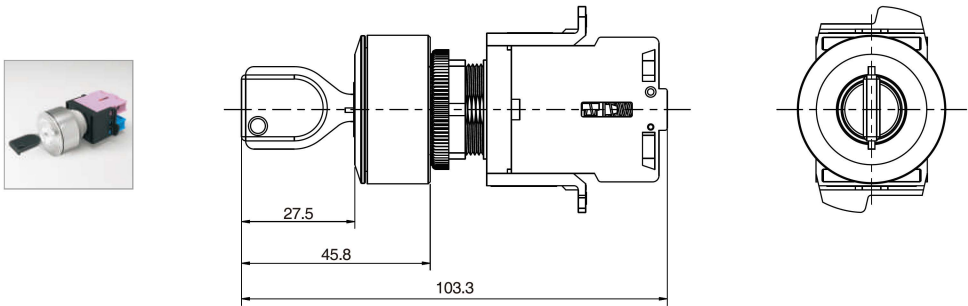

Panel Cut-out

