

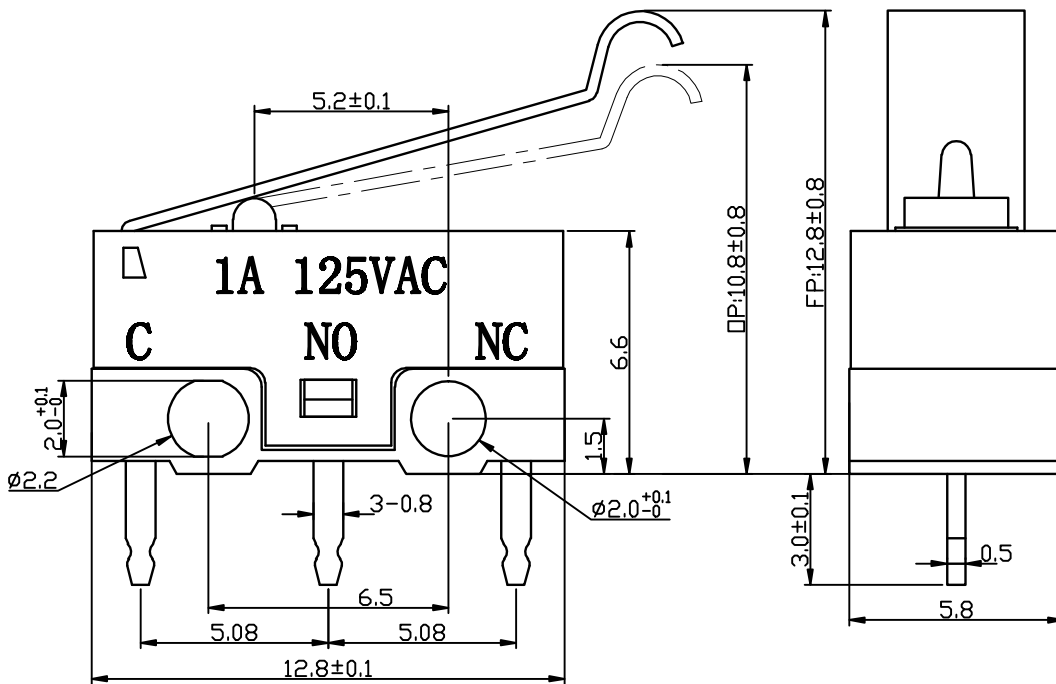


## RJSD-M1-04P-30-3

<b>Rating</b>	<b>DC30V 100mA</b>	<b>Electrical Life</b>	<b>300,000 cycles</b>
<b>Contact Resistance</b>	<b>500mΩ Max</b>	<b>Mechanical Life</b>	<b>300,000 cycles</b>
<b>Insulation Resistance</b>	<b>&gt;100MΩ DC500V</b>	<b>Ambient Temper. Used</b>	<b>-25℃ to +85℃</b>
<b>Withstand Voltage</b>	<b>AC500V 1min.</b>	<b>Ambient Humidity Used</b>	<b>≤85% at +40℃</b>
<b>Soldering Temper.</b>	<b>235±5℃ 5s</b>	<b>Operating Force</b>	<b>30±15gf max</b>



7		SUS	
6			
5		C2680	
4		C5210	
3		PBT	
2		PBT	
1		PBT	

<b>DRAWING NO.</b>				MODIFIED		REMEMBER	
<b>MODEL NAME</b>	RJSD-M1-04P-30-3	①					
<b>TOLERANCE</b>	±0.2	②					
<b>Triangle Method</b>		③					
<b>UNIT</b>	m.m.	④					
<b>EDITION</b>	B/0	⑤					
<b>DRAWN</b>		<b>CHECKED</b>		<b>APPROVED</b>			