



Specifications

Operating Temperature	-20~+55℃		
Operating Humidity	45~85%		
Store Temperature	-45~+80℃		
Store Humidity	95%RH		
Degree of Protection	IP65(IEC 60529) IP20(IEC 60529)		
Insulation Resistance	100MΩ (500V DC)		
Dielectric Strength	2,500VAC/1		
	2,000VAC/1		
Vibration Resistance	10~500Hz	0.35mm	50m/s ²
	10~500Hz	0.35mm	50m/s ²
	5~55Hz 30Hz	0.5mm 1.5mm	
Shock resistance	150 m/s ²		
	1,000 m/s ²		
	100 m/s ² 1,000 m/s ²		
Mechanical Life	250,000		
	5,000,000		
	1,000,000		
	250,000		
	100,000		
Electrical Life	250,000		
	100 000		
	100,000 50,000		

Contact Ratings

		600V			
		10A			
		24V	120V	240V	380V
AC (50/60Hz)	(AC-12)	10A	10A	6A	2A
	(AC-15)	10A	6A	3A	1.9A
DC	(DC-12)	8A	2.2A	1.1A	-
	(DC-13)	4A	1.1A	0.55A	-

How to Order

RJSMS2225E	—				
Mounting Size	Operation Type	Operation Characteristic	Contact Structure	Selection Code	
Ø22 Ø25	4: Selector (2P) 5: Selector (3P) 6: Key Switch (2P) 7: Key Switch (3P)	2: Square	10: NO 1: NC 20: 2NO 2: NC 11: NO+NC	2: 2 postion Maintained 3: 3 postion Maintained 0: 2 postion Momentary 7: 3 postion Left Momentary, Right Maintained 6: 3 postion Right Momentary, Left Maintained 1: 3 postion Momentary	

■ Keylock Switch


Product appearance	Positions	Operation	Contact	Model
Key Switches 		Momentary	1NO	RJSMS2225E -6210-0
			1NC	RJSMS2225E -6201-0
			2NO	RJSMS2225E -6220-0
			2NC	RJSMS2225E -6202-0
			1NO+1NC	RJSMS2225E -6211-0
		Maintained	1NO	RJSMS2225E -6210-2
			1NC	RJSMS2225E -6201-2
			2NO	RJSMS2225E -6220-2
			2NC	RJSMS2225E -6202-2
			1NO+1NC	RJSMS2225E -6211-2
		Maintained	2NO	RJSMS2225E -7220-3
			2NC	RJSMS2225E -7202-3
			1NO+1NC	RJSMS2225E -7211-3

■ Keylock Positions


/Sort	Reset Style				Key out Positon							
	Maintained	Momentary										
3Positon												
Code	2	0			A	B		D				
3Positon												
Code	3	7	6	1	A	B	C	D	E	F	G	

Selector/Key basic rotation angle 90°

■ Combination

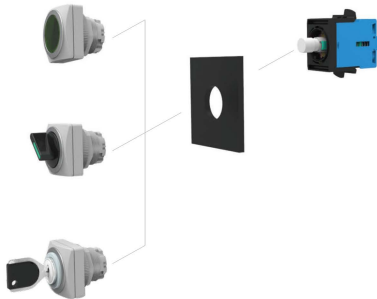

■ Drawing

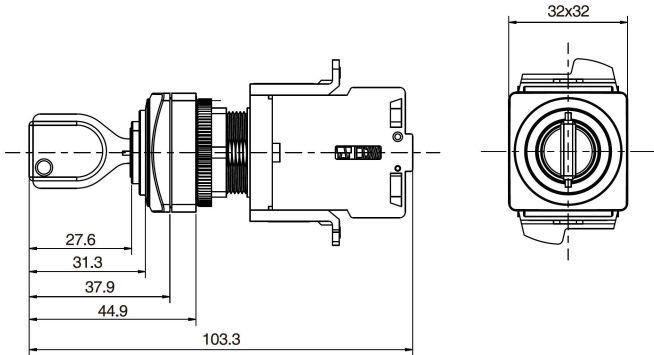

■ Panel Cut-out

