

## Safety Limit Switches

### Description



The P series safety limit switches conform to EN 50047 and have been developed to provide a range of options including plastic cases in various sizes, a choice of snap acting, slow break/make with 2 contact configurations and a choice of actuator heads.

The D series offers the option of rotating the head in 90° increments before installation to allow ease of mounting.

RJS's limit switches can be used in other applications other than guard doors, for example on moving machine beds, crane arms, lifts, elevators, etc.

Operation of these limit switches is achieved by the sliding action of the guard or other moving object deflecting the plunger or lever. For safety applications it is important that upon actuation, the guard or other moving objects should not pass completely over the switch and allow the plunger or lever to return to its original position.

### Features

- Conforms to EN (TUV) standards corresponding to the CE marking
- Positive opening operation of NC (Normally Closed) contacts conforming to IEC /EN 60947-5-1 
- Double insulation makes ground terminal unnecessary (Bears  marking)
- Wide standard operating temperature range: -25° C to 80° C
- Full range of actuator heads and levers suitable for safety applications
- Sealing up to IP 67
- Wide switch variations, (Snap action and slow action basic switches)
- International conduit sizes



- BAUART GEPRÜFT
- TYPE APPROVED

### Specifications

<b>Standards</b>	EN60947-5-1, UL508, EN50047, EN1088
<b>Approvals</b>	cULus, TUV and CE marked for all applicable directives
<b>Positive Opening Operation</b>	NC Contact
<b>Utilization Category</b>	AC15 A600
<b>Min Current</b>	5V, 5mA, DC
<b>Thermal Current (Ith)</b>	10A
<b>Rated Insulation Voltage</b>	600V AC
<b>Rated Impulse withstand Volt</b>	2500V AC
<b>Insulation Resistance</b>	100MΩ min. (DC 500V)
<b>Contact Resistance</b>	25mΩ max. (Initial)
<b>Max Switching Speed</b>	250mm/s
<b>Max Switching Frequency</b>	6000 operation per hour
<b>Enclosure Material</b>	UL approved glass-filled polybutylene terephthalate
<b>Roller Material</b>	Various polymers
<b>Enclosure Protection</b>	IP 67
<b>Operating Temperature</b>	Min -25°C(-18°F) Max 80°C (+176°F)
<b>Pollution Degree</b>	3
<b>Protection Against Electric Shock</b>	Class II (Double Insulation)
<b>Mech. Life Expectancy</b>	1 x 10 <sup>7</sup> Cycles min
<b>Electrically Life Expectancy</b>	150,000 Cycles min
<b>Vibration</b>	IEC 68-2-6, 10-55Hz ± 1 Hz, Excursion: 0.35mm, 1octave/min
<b>Conduit Entry</b>	Various (see Product Selection table)
<b>Fixing</b>	4 x M5

## Safety Limit Switches

### Structure Description

#### Metal Lever Setting

Grooves which engage the lever every 18° are cut in the operation indicator disk to prevent the lever from slipping against the rotary shaft.

#### Hand

With roller lever models, the direction of the switch head can be varied to any of the four directions by loosening the roller lever switch screws at the four corners of the head.

#### Cover

The cover, with a hinge on its lower part, can be opened by removing the screw of the cover, which ensures ease of maintenance and wiring.

#### Contact Block

Wide switch variations.  
Snap-action: 1NC/1NO  
Slow-action: 1NC/1NO, 2NC, 2NC/1NO, 3NC

#### Conduit

Wide switch variations.  
PG13.5  
M20  
1/2-14NPT

### Product Selection

RJSP-□-□-□

1 2 3

#### 1.THREAD DIMENSION OF LEAD EXIT

- 1: PG13.5 (s)
- 2: 1/2NPT (c)
- 6: M20 (O)
- 7: Connector (C)

#### 2.CONTACT TYPES

- 1: 1NC/1NO SLOW ACTION (BBM)(S)
- 2: 2NC SLOW ACTION(O)
- 3: 1NC/1NO SNAP ACTION(C)
- 4: 2NC/1NO SLOW ACTION(S)
- 5: 3NC SLOW ACTION(S)

#### 3.HEAD AND ACTUATOR

- 20: Roller arm type
- 21: Adjustable roller arm type (standard roller)
- 31: Push plunger type
- 32: Roller plunger type

\*(s):standard (o):option (c): customization

### Contact Block Form

TYPE	CONTACT FORM	CONNECTOR PIN ARRANGEMENT	OPERATION DIAGRAMS
RJSP-□-1-□□	1NC/1NO(Slow action) (See Note 1)		
RJSP-□-2-□□	2NC (Slow action) (See Note 2)		
RJSP-□-3-□□	1NC/1NO(Snap action) (See Note 1)		
RJSP-□-4-□□	3NC (Slow action)		<b>No Connector TYPE</b>
RJSP-□-5-□□	2NC/1NO(Slow action)		

## Safety Limit Switches

### Operating Characteristics

Unit: mm

Item

Operating Characteristics

Dimensions


#### RJSP-20

Roller Arm Type



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSP-X-1-20	Slow 1NC/1NO	30°	41°	6.5 N	45°	19.0 N	80°
RJSP-X-2-20	Slow 2NC	30°	-	6.5 N			
RJSP-X-3-20	Snap 1NC/1NO	28°	-	5.3 N			
RJSP-X-4-20	Slow 2NC/1NO	30°	41°	6.5 N			
RJSP-X-5-20	Slow 3NC	30°	-	6.5 N			

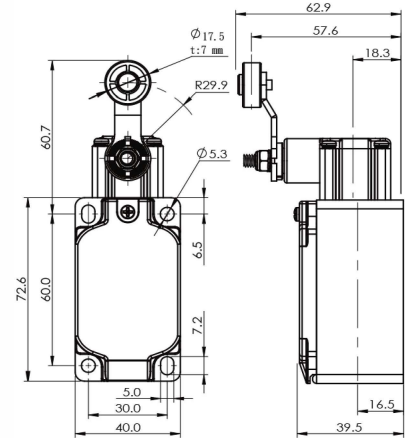


#### RJSP-21

Adjustable Roller Arm Type  
(Standard arm)



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSP-X-1-21	Slow 1NC/1NO	30°	41°	6.5 N	45°	19.0 N	80°
RJSP-X-2-21	Slow 2NC	30°	-	6.5 N			
RJSP-X-3-21	Snap 1NC/1NO	28°	-	5.3 N			
RJSP-X-4-21	Slow 2NC/1NO	30°	41°	6.5 N			
RJSP-X-5-21	Slow 3NC	30°	-	6.5 N			

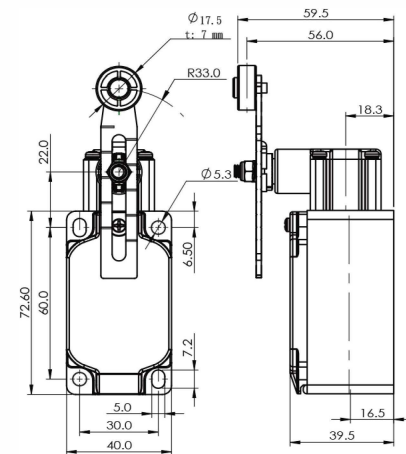


#### RJSP-31

Adjustable Roller Arm Type  
(Long arm)



(Only for slow action models.)

Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSP-X-1-31	Slow 1NC/1NO	30°	41°	5.2 N	45°	19.0 N	80°
RJSP-X-2-31	Slow 2NC	30°	-	5.2 N			
RJSP-X-3-31	Snap 1NC/1NO	28°	-	4.5 N			
RJSP-X-4-31	Slow 2NC/1NO	30°	41°	5.2 N			
RJSP-X-5-31	Slow 3NC	30°	-	5.2 N			

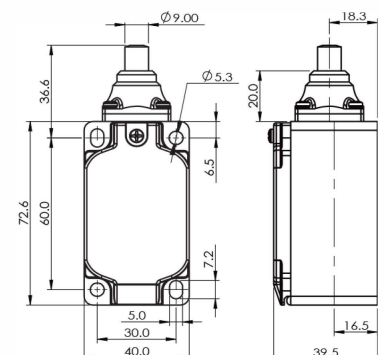

## Safety Limit Switches

### Operating Characteristics

Unit: mm

Item

Operating Characteristics

Dimensions

### RJSP-32

Roller Plunger Type



Type	Contact Block	Operating travel (PT)	PT2nd	Operating Force (OF)	Positive Opening		Total Travel
					Travel (min)	Force (min)	
RJSP-X-1-32	Slow 1NC/1NO	2.2 mm	3.0	7.26 N	3.2 mm	19.0 N	6.0 mm
RJSP-X-2-32	Slow 2NC	2.2 mm	-	7.42 N			
RJSP-X-3-32	Snap 1NC/1NO	1.9 mm	-	6.71 N			
RJSP-X-4-32	Slow 2NC/1NO	2.2 mm	3.0	7.26 N			
RJSP-X-5-32	Slow 3NC	2.2 mm	-	7.42 N			

