

Specifications

Degree of Protection	IP 40 Watertight /Oiltight
Contact Configuration	Single Pole, Double Pole
Maximum Voltage	250V AC/DC
Thermal Current	3A
Minimum Applicable Load	5V AC/DC, 1mA
Contact Material	Gold-plated silver
Terminal Style	.110" Solder/Quick Connect
Operating Temperature	-25°Cto +55°C
Operating Humidity	45 to 85% RH
Contact Resistance	50MΩ maximum
Insulation Resistance	100MΩ minimum (500V DC megger)
Vibration Resistance	10 to 55Hz, amplitude 1.2mm p-p
Degree of Protection	>10g
Electrical Life	100,000 operations minimum (at full rated load)
Mechanical Life	Maintained: 1,000,000 operations minimum Momentary: 1,000,000 operations minimum Selectotr /Keylock: 250, 000 operations minimum
Dielectric Strength	Switch Unit: 2,000V AC, 1min. between live/dead part and terminals of different poles; 1,000V AC, 1 minute between terminals of the same pole; 1,500V AC, 1 minute between contact and lamp terminals. Illumination Unit: 2,000V AC, 1min. between live Part/ground
Soldering Temperature	20W/5 Seconds or 260C/3 seconds

Contact Ratings

Working voltage		24V	110V	220V
AC (50/60Hz)	Resistive	—	1.0A	0.5A
	Inductive	—	0.7A	0.5A
DC	Resistive	1.0A	0.2A	—
	Inductive	0.7A	0.1A	—




LED Ratings

Rated Voltage	Current
5V DC ± 5%	8mA
6V AC/DC (± 10%)	AC: A, R, W, Y: 8mA G, S: 7mA
	DC: A, R, W, Y: 6mA G, S: 5mA
12V AC/DC(± 10%)	AC: 9mA DC: 8mA
24V AC/DC(± 10%)	AC: 9mA DC: 8mA


How to Order

RJSPS [] A	—				
↓	↓	↓	↓	↓	↓
Mounting Size	Operation Style	Operation Characteristic	Contact Structure	Colour	Voltage
12mm	Momentary Latching	1: Round 2: Square 3: Rectangle 7: Round (LED) 8: Square (LED) 9: Rectangle (LED)	Nil SPDT(1a+1b) DPDT(2a+2b)	R Red G Green Y Yellow W White B Blue A Orange	24VDC 12VDC 6.3VDC 110VAC 220VAC

12mm Push Button Switch

Product appearance	Operation	Illuminated type	Contact	Model	Colour	Rated Voltage
RJSPS12A Round 	Momentary	Without LED	SPDT	RJSPS12A~ 211	R Red G Green Y Yellow W White B Blue	24VDC 12VDC 6.3VDC 110VAC 220VAC
			DPDT	RJSPS12A~ 212		
		With LED	SPDT	RJSPS12A~ 271		
			DPDT	RJSPS12A~ 272		
	Latching	Without LED	SPDT	RJSPS12A~ 311		
			DPDT	RJSPS12A~ 312		
		With LED	SPDT	RJSPS12A~ 371		
			DPDT	RJSPS12A~ 372		
			DPDT	RJSPS12A~ 372		
RJSPS12A Square 	Momentary	Without LED	SPDT	RJSPS12A~ 221	R Red G Green Y Yellow W White B Blue	24VDC 12VDC 6.3VDC 110VAC 220VAC
			DPDT	RJSPS12A~ 222		
		With LED	SPDT	RJSPS12A~ 281		
			DPDT	RJSPS12A~ 282		
	Latching	Without LED	SPDT	RJSPS12A~ 321		
			DPDT	RJSPS12A~ 322		
		With LED	SPDT	RJSPS12A~ 381		
			DPDT	RJSPS12A~ 382		
			DPDT	RJSPS12A~ 382		
RJSPS12A Rectangle 	Momentary	Without LED	SPDT	RJSPS12A~ 231	R Red G Green Y Yellow W White B Blue	24VDC 12VDC 6.3VDC 110VAC 220VAC
			DPDT	RJSPS12A~ 232		
		With LED	SPDT	RJSPS12A~ 291		
			DPDT	RJSPS12A~ 292		
	Latching	Without LED	SPDT	RJSPS12A~ 331		
			DPDT	RJSPS12A~ 332		
		With LED	SPDT	RJSPS12A~ 391		
			DPDT	RJSPS12A~ 392		
			DPDT	RJSPS12A~ 392		


Installation Size




A	B
≥12mm	≥12mm
≥12mm	≥12mm
≥12mm	≥16mm

Drawing


RJSPS12A Round

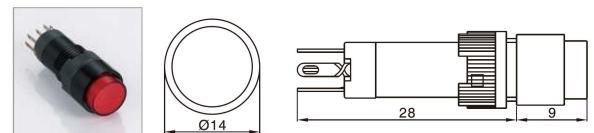

RJSPS12A Square


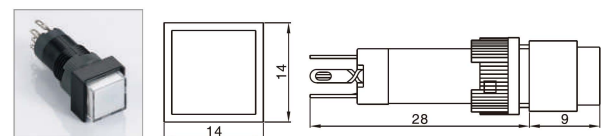


RJSPS12A Rectangular

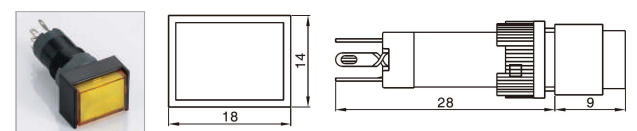

Terminal Style / LED Circuit

Push Button Terminal Style



12VDC, 24VDC, 110VAC, 220VAC