

# RJSPS22E Series



## Specifications

RoHS CE

Operating Temperature	-20~+55℃					
Operating Humidity	45-85%					
Store Temperature	-45~+80℃					
Store Humidity	95%RH					
Degree of Protection	IP65(IEC 60529)			IP20(IEC 60529)		
Insulation Resistance	100MΩ		500V DC			
Dielectric Strength	2,500VAC/1"			2,000VAC/1"		
Vibration Resistance	10-500Hz	0.35mm	50m/s <sup>2</sup>	5-55Hz	0.5mm	
	10-500Hz	0.35mm	50m/s <sup>2</sup>	30Hz	1.5mm	
Shock resistance	150 m/s <sup>2</sup>			100 m/s <sup>2</sup>		
	1,000 m/s <sup>2</sup>			1,000 m/s <sup>2</sup>		
Mechanical Life	250,000	5,000,000	250,000	250,000	250,000	
		1,000,000	100,000	100,000	100,000	
Electrical Life	100,000				100,000	50,000


## LED / LED Ratings

Unit type	Operating Voltage	Current consumption	Color code
LSED-6 2	6V AC/DC	10mA(A, R, Y); 7mA(G, PW, S)	Black
LSED-1 2	12V AC/DC	14mA(A, R, Y); 13mA(G, PW, S)	Green
LSED-2 2	24V AC/DC	14mA(A, R, Y); 13mA(G, PW, S)	Red
LSED-H 2	110V AC/DC	5mA	Blue
LSED-M3 2	230/240V AC/DC	3mA	White
			Yellow


## Contact Ratings

Rated insulation voltage		600V			
Rated current		10A			
Rated voltage		24V	120V	240V	380V
AC (50/60Hz)	(AC-12)	10A	10A	6A	2A
	(AC-15)	10A	6A	3A	1.9A
DC	(DC-12)	8A	2.2A	1.1A	-
	(DC-13)	4A	1.1A	0.55A	-

## Installation Size




## Selector / Key Lock Switch Select Code

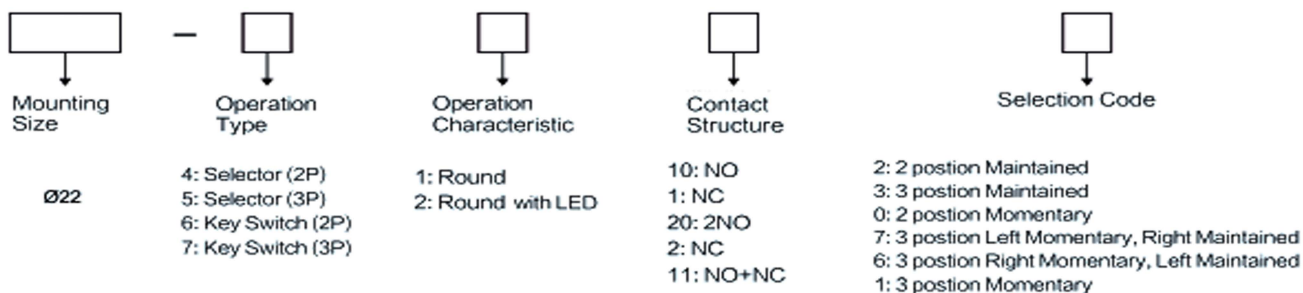


Sort	Reset Type				Key out Positon							
	Maintained	Momentary										
3Positon	⊗	⊖			⊗	⊗		⊗				
Code	2	0			A	B		D				
3Positon	⊕	⊖	⊖	⊖	⊗	⊗	⊗	⊗	⊖	⊗	⊗	⊗
Code	3	7	6	1	A	B	C	D	E	F	G	

<sup>1</sup> Selector/Key basic rotation angle 90°

## Diagram

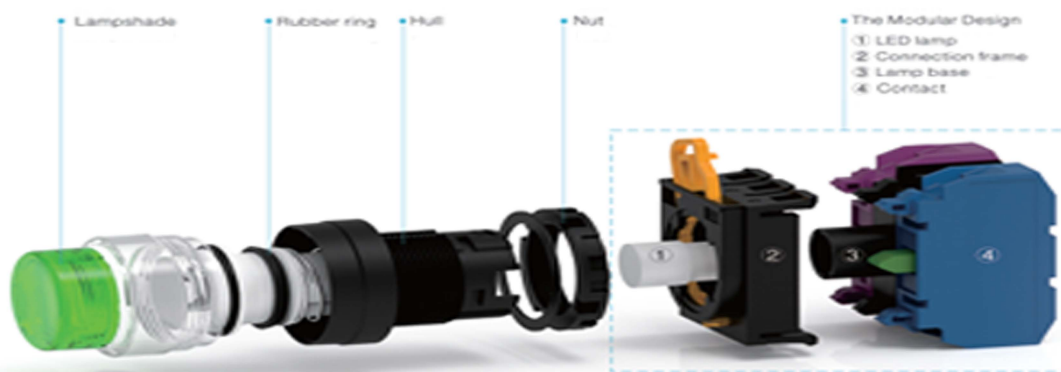

## Combination

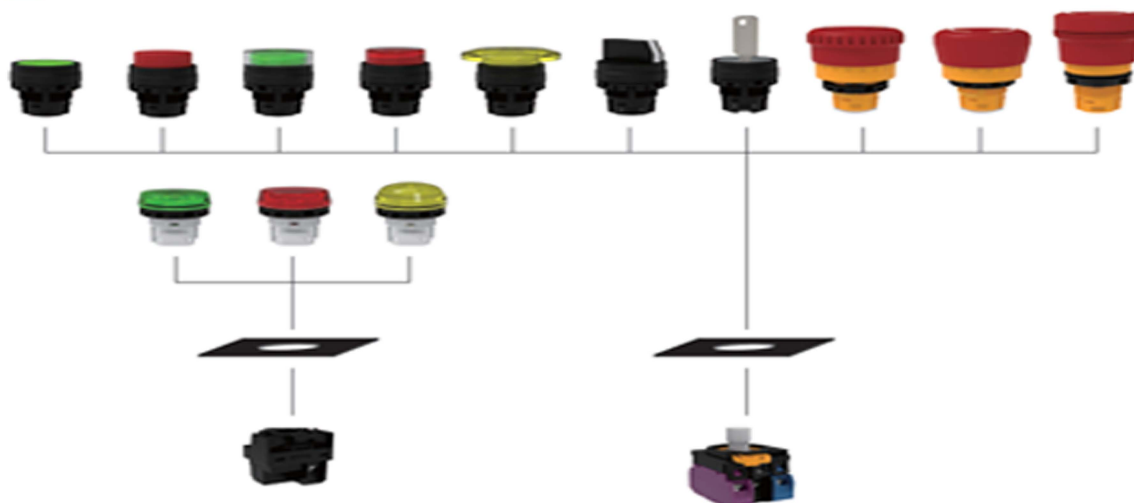

# RJSPS22E Series

Product appearance	Positions	Operation	Contact
<b>Selector Switches 2P</b> 		Momentary	1NO 1NC 2NO 2NC 1NO+1NC
		Maintained	1NO 1NC 2NO 2NC 1NO+1NC
<b>Selector Switches 3P</b> 		Momentary	2NO 2NC 1NO+1NC
		Maintained	2NO 2NC 1NO+1NC
		Right Momentary Left Maintained	2NO 2NC 1NO+1NC
		Left Momentary Right Maintained	2NO 2NC 1NO+1NC
<b>Selector Switches 2P</b> 		Momentary	1NO 1NC 2NO 2NC 1NO+1NC
		Maintained	1NO 1NC 2NO 2NC 1NO+1NC
<b>Selector Switches 3P</b> 		Momentary	2NO 2NC 1NO+1NC
		Maintained	2NO 2NC 1NO+1NC
		Right Momentary Left Maintained	2NO 2NC 1NO+1NC
		Left Momentary Right Maintained	2NO 2NC 1NO+1NC

