




- Hole sizes: 22/25/30/40mm
- Protection level: IP65/IP67/IK10
- Comply with IEC60947-5-1 GB14048.5 standard

Install Size



Switching Operation

Type	Sign	Diagram	Contact type	Terminal Description
No.2				

Explanation: Using two terminals, double-break and slow-motion contact.
Y type NC switch can be made to order for individual product, pls check the product description.

LED Ratings

Lamp Type	LED lamp(AC/DC)
Rated Voltage	3V,6V,12V,24V,36V,48V,110V,220VAC/DC
Rated Current	15mA - 20mA
LED Colour	R G Y O B W
Life	40000 hours(Reference)
Lamp Circuit diagram	

Using AC/DC LED lamp, the terminals have no difference of anode and cathode

DC LED and other voltage can be made to order.

Rated Parameters

Working voltage		24V	110V	220V
Contact Parameter	AC (50/60Hz)	—	1.0A	0.5A
		—	0.7A	0.5A
	DC	1.0A	0.2A	—
		0.7A	0.1A	—

Contact Ratings


Rated insulation voltage			250V		
Heating current Ith			3A Temperature does not exceed the maximum allowed current		
Rated voltage			24V	110V	220V
Rated current	AC 50/60Hz	Resistive load	2A	-	-
		Inductive load	-	1A	0.5A
	DC	Resistive load	0.7A	0.2A	0.1A
		Inductive load	-	-	-
Contact material			Silver nickel oxide	Silver Plated Gold	

Appearance	Illuminated type	Operation	Contact	Model	Colour	Voltage	Crust material
High ring round 	With LED	Momentary	1NO+1NC	RJS103-22L-H-R~67J	■ Red ■ Green ■ Blue ■ White ■ Yellow ■ Orange	24VDC 12VDC 6.3VDC 110VAC 220VAC	BS – Brushed Steel BLK – Anodised Black Aluminium Custom Finishes (subject to MOQs)
		Latching	1NO+1NC	RJS103-22L(A)-H-R~67J			
Flat ring round 	With LED	Momentary	1NO+1NC	RJS103-22L-F-R~67J			
		Latching	1NO+1NC	RJS103-22L(A)-F-R~67J			
Flat dot round 	With LED	Momentary	1NO+1NC	RJS103-22L-F-D~67J			
		Latching	1NO+1NC	RJS103-22L(A)-F-D~67J			
Domed ring round 	With LED	Momentary	1NO+1NC	RJS103-22L-B-R~67J			
		Latching	1NO+1NC	RJS103-22L(A)-B-R~67J			

RJS103-22L(A)-H-R~67J




1Pole

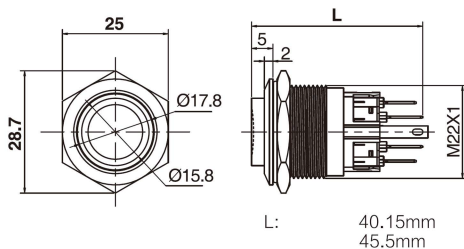

RJS103-22L(A)-F-R~67J




1Pole

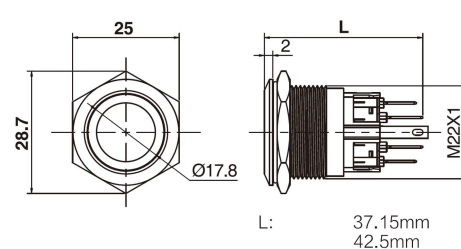

RJS103-22L(A)-F-D~67J




1Pole

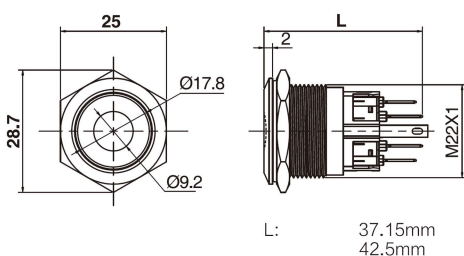

RJS103-22L(A)-B-R~67J



1Pole

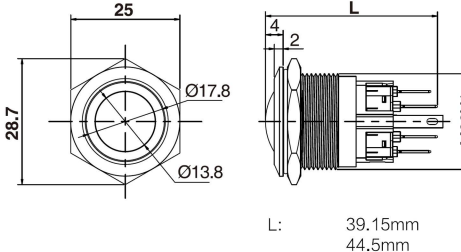

How to Order

Corresponding number	R J S 1 0 3 - 2 2 L (A) - H - R ~ 6 7 J									
		<u>1</u>	<u>2</u>	<u>3</u>	<u>4</u>	<u>5</u>	<u>6</u>	<u>7</u>	<u>8</u>	
1	Install size	22/25/30/40mm								
2	Action style	Momentary		Maintained						
3	Shape of top	Flat Round		High Round		Domed		Mushroom head		Full light type
4	Illumination Type	High Ring Illumated		Ring Illumated		Dot Illumated		Domed Illumated		
5	Color									
6	Material	Stainless steel		Black Anodised Aluminium						
7	Voltage	24VDC 110VAC		12VDC 220VAC		6.3VDC				
8	IP Rating	IP65		IP67						