


RJSX03-28 SERIES
METAL PUSH BUTTON SWITCH




Product Appearance	Shape of Head	Illuminated Type	Operation	Contact Type	Model
	Flat Round	Without LED	Momentary	1NO+1NC	RJS103-28-F~67J
				2NO+2NC	RJS203-28-F~67J
			Latching	1NO+1NC	RJS103-28-A-F~67J
				2NO+2NC	RJS203-28-A-F~67J
	High Round	Without LED	Momentary	1NO+1NC	RJS103-28-H~67J
				2NO+2NC	RJS203-28-H~67J
			Latching	1NO+1NC	RJS103-28-A-H~67J
				2NO+2NC	RJS203-28-A-H~67J
	Domed Round	Without LED	Momentary	1NO+1NC	RJS103-28-B~67J
				2NO+2NC	RJS203-28-B~67J
			Latching	1NO+1NC	RJS103-28-A-B~67J
				2NO+2NC	RJS203-28-A-B~67J

Flat Round

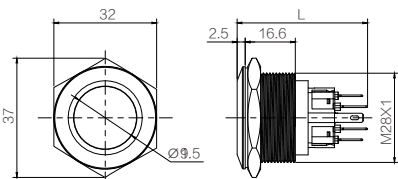


L: Momentary 43.15mm
Latching 44.8mm

High Round

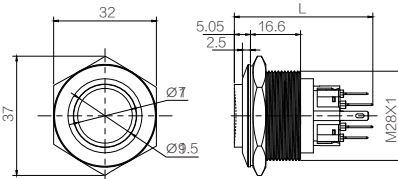

L: Momentary 45.7mm
Latching 47.35mm

Domed Round

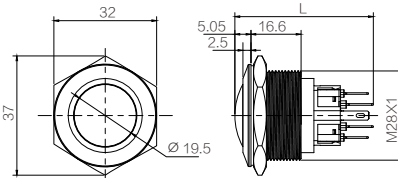

L: Momentary 45.7mm
Latching 47.35mm

Rating: 5A 250VAC
Contact Resistance: 50mΩ MAX
Insulation Resistance: 100MΩ 500VDC
Dielectric Strength:1000VAC rms
Electrical life:100000cycles
Operating Temperature:-30° C ~55° C .
Operating Pressure:2N~5N
Operating travel:1.5mm~2.5mm
Protection Grade:IP67
Soldering 300° C max. for 5seconds
Function:OFF (ON)
Material
Shell: stainless steel
Nut: nickel plated brass
Button: 316 stainless steel
Base: PA66
Terminals: copper plating gold
Contact: silver tin oxide