


Specifications




Circuit	:SP5T
Current Rating	:50mA @ 12VDC
Contact Resistance	:100mOhm Max.(initial)
Insulation Resistance	:100MOhm Min.
Operating Force	:220gf±50gf
Total Travel	:0.3mm±0.1mm
Mechanical Life	:1,000,000 cycles Min.
Operating Temperature	:-10 deg.~+60 deg.

Materials	
Cover	:Polycarbonate (PC)
Reflector	:Polyamide(PA)
Base	:Polyamide(PA)
Action Dome	:Stainless steel with silver plating
Terminal	:Phosphor bronze (PBS) with gold plating

Contact Configuration & Panel Cut-out




Pin	Function	Pin	Function
1	SW COM.	7	LED(+)
2	SW 1 N.O.	8	SW 1 LED(-)
3	SW 2 N.O.	9	SW 2 LED(-)
4	SW 3 N.O.	10	SW 3 LED(-)
5	SW 4 N.O.	11	SW 4 LED(-)
6	SW 5 N.O.	12	SW 5 LED(-)



Panel Thickness:
1.0mm~3.2mm

Dimensions

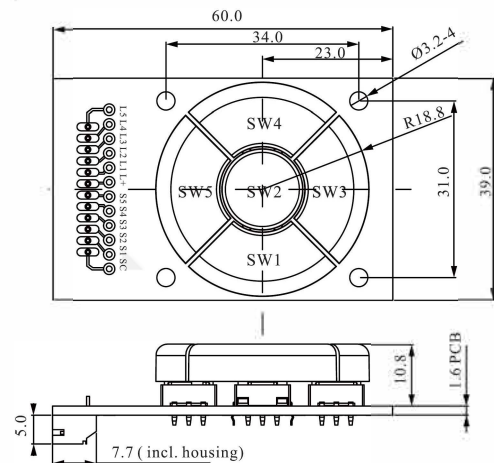


How to Order

Module		
Part No	SPD5K2-AM004-Z	SPD5K2-AM012-Z
Description	Painted Black cap with Laser Marking Red LED	Painted White Cap with Laser Marking Blue LED

※ Color is subject to actual product.
※ We provide Laser Marking service.

Option



Cable: YCW002