

SPECIFICATIONS

ELECTRICAL LIFE: 10,000 cycles

CONTACT RATING: Switch :100M Ω max

INSULATION RESISTANCE: 100M Ω min @ 500 VDC.

CONTACT RESISTANCE: Initial : 50m Ω @ 2-4VDC @ 100mA.

DIELECTRIC STRENGTH: 500 VAC/1minute.

CAPACITANCE: 5pf max.



TEMPERATURE RANGE: Operating/Storage : -20°C to+ 70°C.

VIBRATION: To MIL-STD-202F. Method 201A.


SHOCK: To MIL-STD-202F. Method 213B, Condition A.

MODEL OPTIONS



MSS3

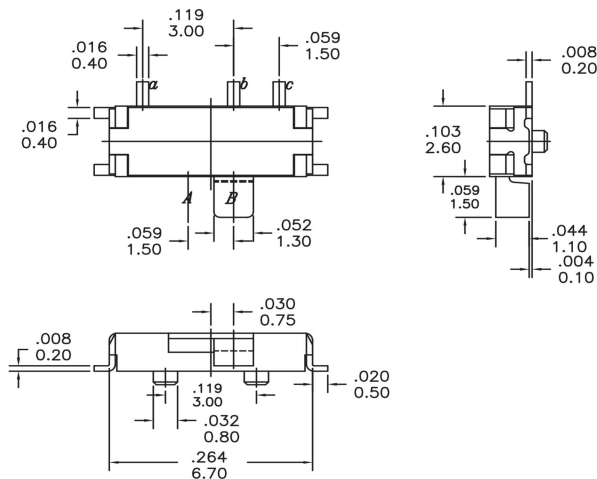


CITCUIT DIAGRAM





MSS4

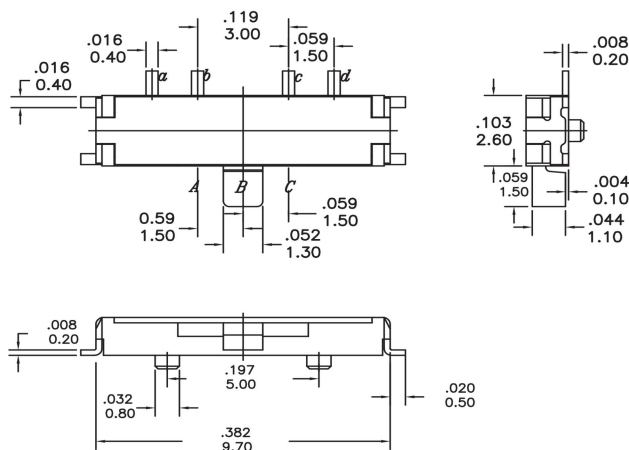

CITCUIT DIAGRAM



MSS6

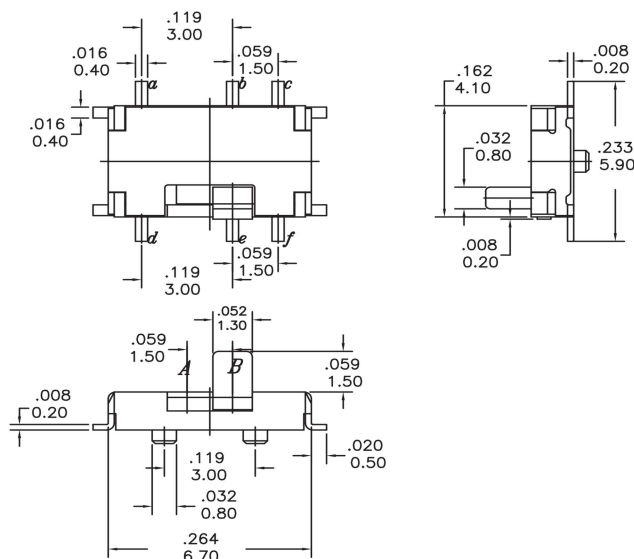

CITCUIT DIAGRAM

