

TC011 SERIES

LED TACT SWITCH



Feature :


- Full color LED illuminated available
- Long electrical life cycles
- Good tactile feeling

Application :

- Audio / video products
- Instrumentation
- Communication equipments




SWITCH SPECIFICATIONS	
POLE - POSITION	Momentary Type , SPST with LED
CONTACT RATING	MAX. : 1mA , 20VDC or 5mA , 5VDC MIN. : 1mA , 5VDC
CONTACT RESISTANCE	200 Ω max. 5 V DC ; 1 mA , by Method of Voltage DROP
INSULATION RESISTANCE	100 MΩ min . 100 V DC for 1 minute
DIELECTRIC STRENGTH	Breakdown is not Allowable ; 250 V AC for 1 Minute
OPERATING FORCE	125±35 gf
OPERATING LIFE	300,000 cycles
OPERATING TEMPERATURE RANGE	-40°C ~ 85°C
TOTAL TRAVEL	1.3±0.3mm

LED SPECIFICATIONS								
ATTENTION LEDs are Electrostatic Sensitive devices  (+) (-)	Unit	Value / LED Color						
		Blue	Pure Green	Red	Yellow (5mA)	Orange	Green	White
LUMINOUS INTENSITY@20mA Iv	mcd	240	1000	180	24	250	50	400
Dominant Wavelength λD	nm	470	525	630	549	601	567	/
FORWARD VOLTAGE@20mA Vf	V	3.3	3.3	1.95	1.8	2.1	2.1	2.1

■ A single bin cannot be ordered, please contact us in advance if you need a particular bin sorting before placing your order to clarify the lead time, MOQ and pricing

► HOW TO ORDER

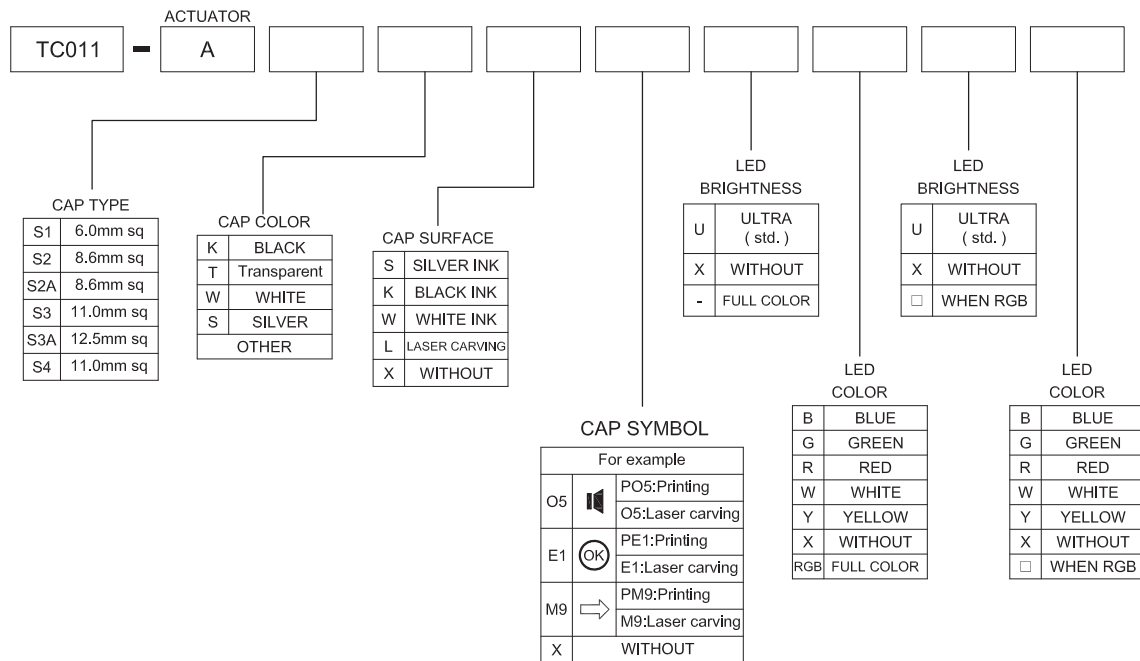






TC011 SERIES

LED TACT SWITCH







DIMENSION

TC011 - A □□ X X □□□□





TC011 - A □□ X X - RGB





CAP TYPE





S1 TYPE





S2 TYPE





S2A TYPE





S3 TYPE



S3A TYPE




S4 TYPE



CIRCUIT

SINGLE COLOR
OR
TWO COLOR



FULL COLOR

