


» Features

- Snap-in type, can be mounted directly on P.C.B Board.
- Parts of output terminals can be used as jumper lead, facilitating circuit design.
- Many LED lights are available.

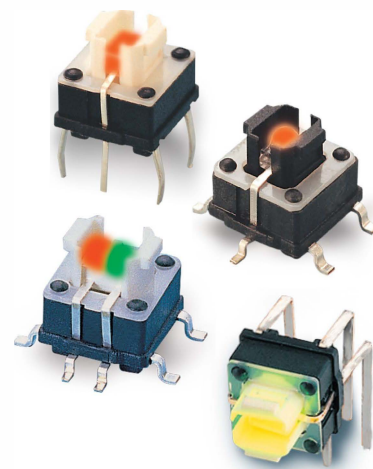

» Applications

- Operating switches in all types of electronic equipment such as audio apparatus, office equipment, communications apparatus, TV sets, VCRs, etc.

» Specifications

Rating	50mA 12VDC
Insulation Resistance	100MΩ Min (at 500 VDC)
Dielectric Strength	AC 250V (50/60 Hz for 1 minute)
Contact Resistance	100mΩ Max. (Initial)
Electrically Life	300,000 Cycles Min
Ambient Temperature	-25°C~ +70°C
Operating Force	160 ± 50gf

» LED Specifications

Color	VR	IF	Recommended Operating Current	VF	
				Nom	Max
Red	DC 5V	20mA	20mA	1.7V	2.4V
Green	DC 5V	20mA	20mA	1.9V	2.4V
Yellow	DC 5V	20mA	20mA	1.9V	2.4V
Blue	DC 5V	20mA	20mA	3.0V	3.6V
White	DC 5V	20mA	20mA	3.0V	3.6V

For the specification about the other LEDs, please contact with sales department

» Product selection

TP 6151

FUNCTION	
Non-LED	
-	Standard Type (2P)
H	Standard Type (4P)
M	SMT Type (2P)
HM	SMT Type (4P)
R	Right Angle
RS	Right Angle (+Fix)
TRF	Trfl Right Angle (+Fix)
LED	
L	Standard Type (2P)
HL	Standard Type (4P)
ML	SMT Type (2P)
HML	SMT Type (4P)
RL	Right Angle
RSL	Right Angle (+Fix)
TRFL	Trfl Right Angle (+Fix)

LED COLOR		
1		Red
2		Yellow
3		Green
4		Blue
5		White
6		Pure Green
8		Amber
9		Blue Green
10		Pink
011		Purple
12		Red/Yellow
13		Red/Green
14		Red/Blue
23		Yellow/Green
48		Blue/Amber
52		White/Yellow
58		White/Amber
-		Non-LED

LED BRIGHTNESS	
-	Standard
C	High Brightness




» Operating characteristics

Unit: mm




Dimensions

P.C.B Layout




TP615L

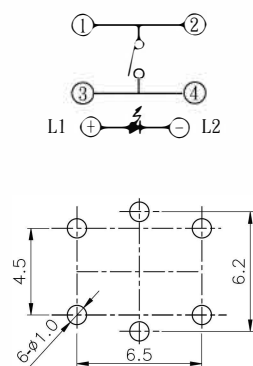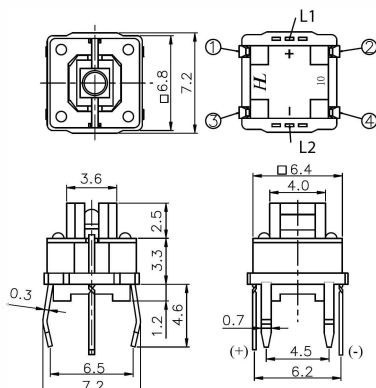




TP6151L

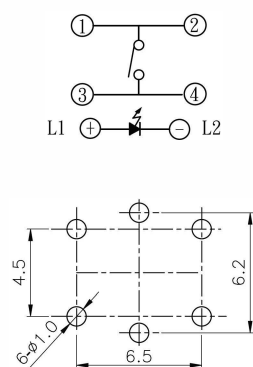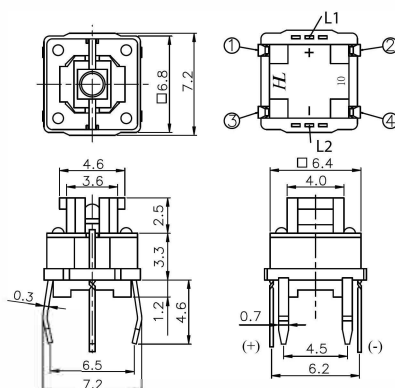

TP6151HL

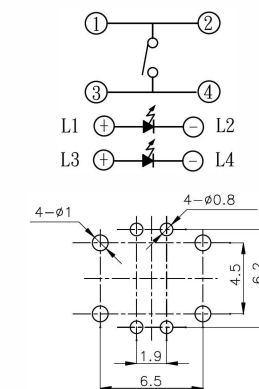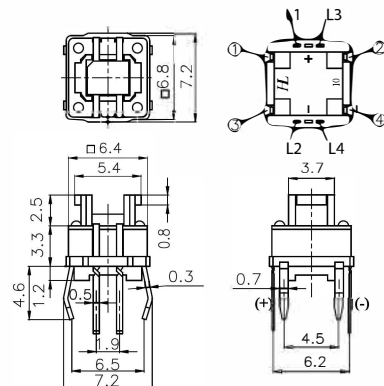

TP6151ML

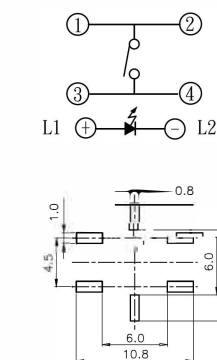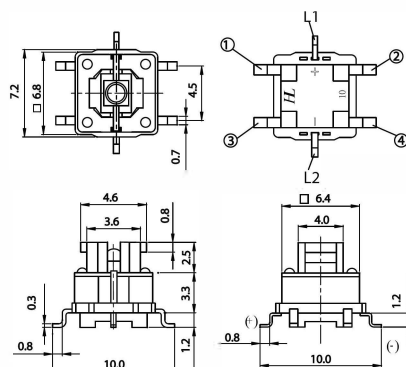




» Operating characteristics

Unit: mm



Dimensions

P.C.B Layout

TP6151HML

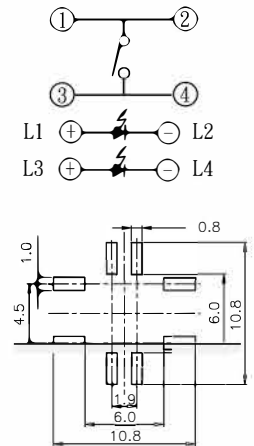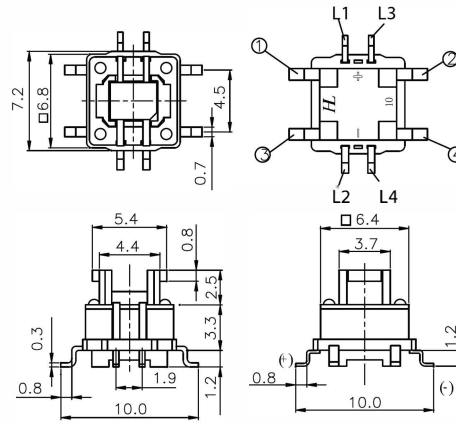

TP6151RSL

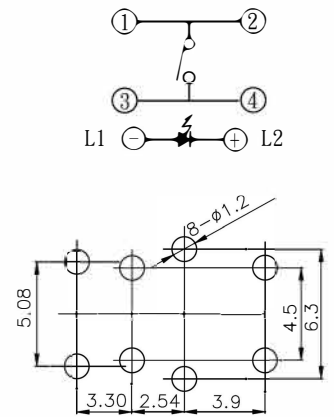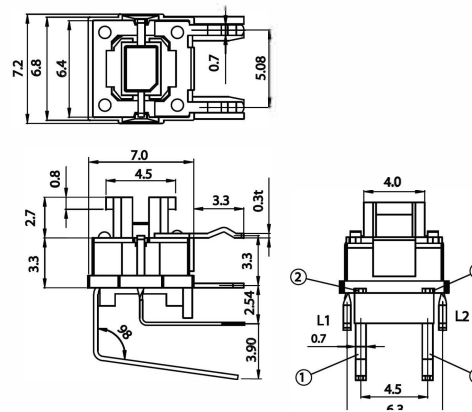

TP615TRFL

