RJSAS22E SERIES

MUSHROOM EMERGENCY STOP SWITCH

Specifications

Operating Temperature	−20~+55℃
Operating Humidity	45~85%
Store Temperature	−45~+80℃
Store Humidity	95%RH
Degree of Protection	IP65(IEC 60529) IP20(IEC 60529)
Insulation Resistance	100MΩ (500V DC)
Dielectric Strength	2,500VAC/1 2,000VAC/1
Vibration Resistance	10~500Hz 0.35mm 50m/s² 10~500Hz 0.35mm 50m/s² 5~55Hz 0.5mm 30Hz 1.5mm
Shock resistance	150 m/s² 1,000 m/s² 100 m/s² 1,000 m/s²
Mechanical Life	250,000 5,000,000 1,000,000 250,000 100,000 250,000 100,000
Electrical Life	100,000 100,000 50,000

Contact Ratings

	Rated insulation voltage	600V			
	Rated current	10A			
	Rated voltage	24V	120V	240V	380V
AC (50/60Hz)	(AC−12)	10A	10A	6A	2A
	(AC−15)	10A	6A	3A	1.9A
DC	(DC−12)	8A	2.2A	1.1A	−
	(DC−13)	4A	1.1A	0.55A	−

LED Ratings

Unit type	Operating Voltage	Current consumption	Color code
LSED−6②	6V AC/DC	10mA(A, R, Y) 7mA(G, PW, S)	A : Amber G : Green PW : White R :Red S :Blue Y :Yellow
LSED−1②	12V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED−2②	24V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED−H②	110V AC/DC	5mA	
LSED−M3②	230/240V AC/DC	3mA	

Combination mode:

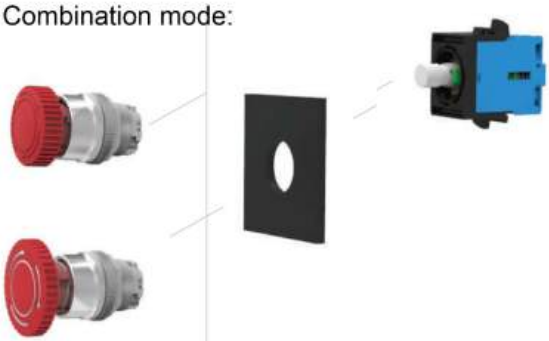

How to order:

RJSAS22E _

Mounting Size	Operation Type	Operation Characteristic	Contact Structure	Color	Voltage
Ø22	Momentary Maintained E−stop Small E−stop	Round Flush with LED	NO NC 2NO NC NO+NC	R Red G Green Y Yellow W White B Blue A Orange	24VDC 12VDC 6.3VDC 110VAC 220VAC

Installation size:



RJSAS22E SERIES

MUSHROOM EMERGENCY STOP SWITCH

RJSAS22E Mushroom

Product appearance	Operation	Contact	Model	Colour
Ø32mm Mushroom	Push-lock Turn Reset	1NC	RJSAS22E-X101	R Red
		2NC	RJSAS22E-X102	

When pressed. the button is locked in the depressed position. and is reset when either pulled or turned clockwise.

RJSAS22E Mushroom

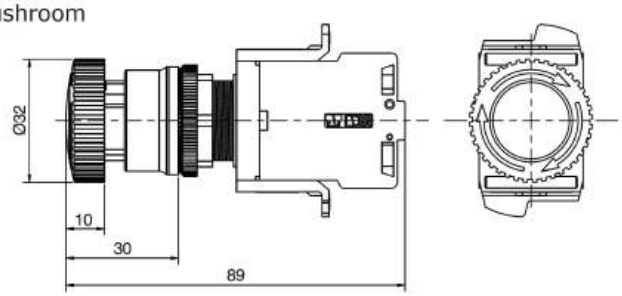

RJSAS22E Mushroom - with LED Illumination

Product appearance	Operation	Contact	Model	Colour	Rated Voltage
Ø32mm Mushroom	Push-lock Turn Reset	1NC	RJSAS22E-X701	R Red	24VDC 12VDC 6.3VDC 110VAC 220VAC
		2NC	RJSAS22E-X702		

When pressed. the button is locked in the depressed position. and is reset when either pulled or turned clockwise.

RJSAS22E Mushroom - with LED Illumination

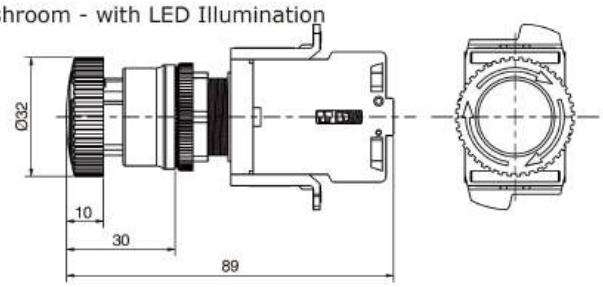

RJSAS22E SERIES

MUSHROOM EMERGENCY STOP SWITCH

RJSAS22E Large Mushroom

Product appearance	Operation	Contact	Model	Colour
Ø40mm Mushroom	Push-lock Turn Reset	1NC	RJSAS22E-8101	R 红色/Red
		2NC	RJSAS22E-8102	

When pressed. the button is locked in the depressed position. and is reset when either pulled or turned clockwise.

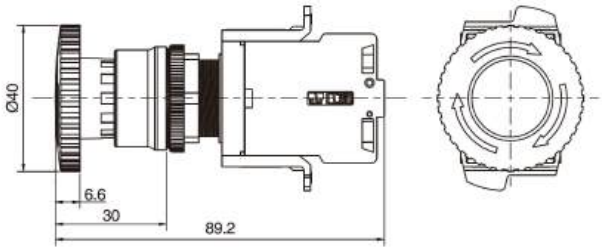

RJSAS22E Large Mushroom - with LED Illumination

Product appearance	Operation	Contact	Model	Colour	Rated Voltage
Ø40mm Mushroom	Push-lock Turn Reset	1NC	RJSAS22E-8701	R Red	24VDC 12VDC 6.3VDC 110VAC 220VAC
		2NC	RJSAS22E-8702		
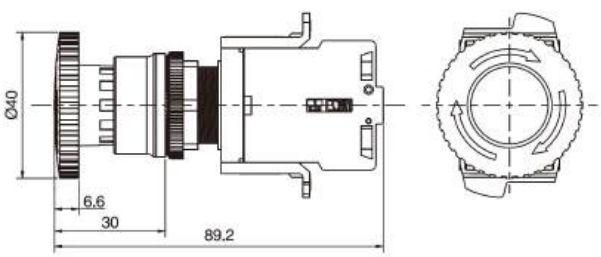
When pressed. the button is locked in the depressed position. and is reset when either pulled or turned clockwise.