

RJSAS22E SERIES
MUSHROOM EMERGENCY STOP SWITCH



Specifications

Operating Temperature	-20~+55℃		
Operating Humidity	45~85%		
Store Temperature	-45~+80℃		
Store Humidity	95%RH		
Degree of Protection	IP65(IEC 60529) IP20(IEC 60529)		
Insulation Resistance	100MΩ (500V DC)		
Dielectric Strength	2,500VAC/1 2,000VAC/1		
Vibration Resistance	10~500Hz	0.35mm	50m/s ²
	10~500Hz	0.35mm	50m/s ²
	5~55Hz 30Hz	0.5mm 1.5mm	
Shock resistance	150 m/s ² 1,000 m/s ²		
	100 m/s ² 1,000 m/s ²		
Mechanical Life	250,000		
	5,000,000		
	1,000,000		
Electrical Life	250,000		
	100,000		


Contact Ratings

		600V			
		10A			
		24V	120V	240V	380V
AC (50/60Hz)	(AC-12)	10A	10A	6A	2A
	(AC-15)	10A	6A	3A	1.9A
DC	(DC-12)	8A	2.2A	1.1A	-
	(DC-13)	4A	1.1A	0.55A	-

LED Ratings

Unit type	Operating Voltage	Current consumption	Color code
LSED-6②	6V AC/DC	10mA(A, R, Y) 7mA(G, PW, S)	A : Amber G : Green PW : White R : Red S : Blue Y : Yellow
LSED-1②	12V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED-2②	24V AC/DC	14mA(A, R, Y) 13mA(G, PW, S)	
LSED-H②	110V AC/DC	5mA	
LSED-M3②	230/240V AC/DC	3mA	


Combination mode:

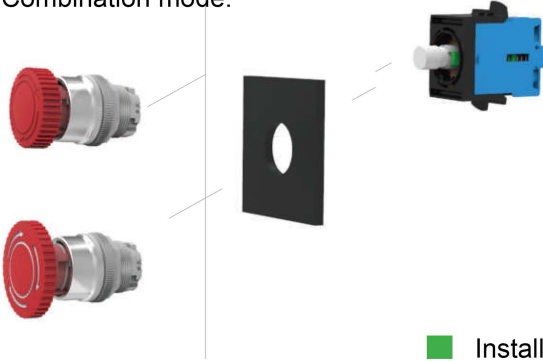

How to order:

RJSAS22E	Mounting Size	Operation Type	Operation Characteristic	Contact Structure	Color	Voltage
Ø22	Ø22	Momentary Maintained E-stop Small E-stop	Round Flush with LED	NO NC 2NO NC NO+NC	R Red G Green Y Yellow W White B Blue A Orange	24VDC 12VDC 6.3VDC 110VAC 220VAC

Installation size:



RJSAS22E SERIES
MUSHROOM EMERGENCY STOP SWITCH




RJSAS22E Mushroom

Product appearance		Operation	Contact	Model	Colour
Ø32mm Mushroom 		Push-lock Turn Reset	1NC	RJSAS22E-X101	 Red
			2NC	RJSAS22E-X102	

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

RJSAS22E Mushroom

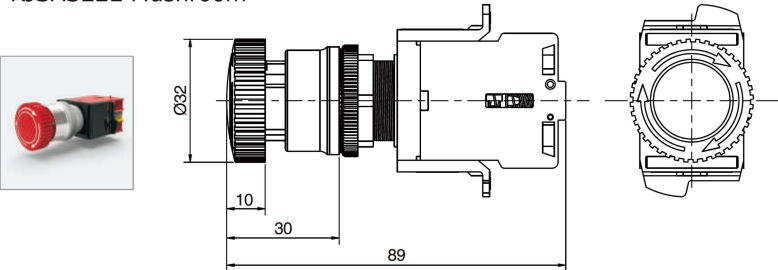


RJSAS22E Mushroom - with LED Illumination

Product appearance		Operation	Contact	Model	Colour	Rated Voltage
Ø32mm Mushroom 		Push-lock Turn Reset	1NC	RJSAS22E-X701	 Red	24VDC 12VDC 6.3VDC 110VAC 220VAC
			2NC	RJSAS22E-X702		

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.


RJSAS22E Mushroom - with LED Illumination

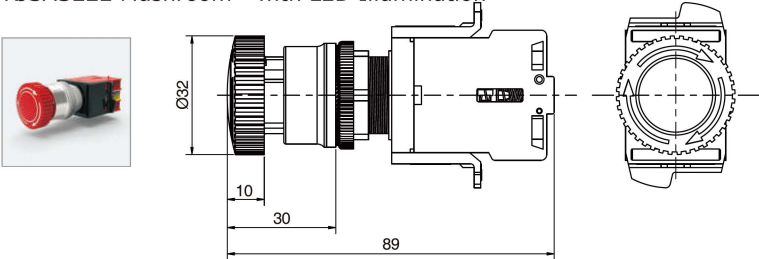

RJSAS22E Large Mushroom

Product appearance	Operation	Contact	Model	Colour
Ø40mm Mushroom 	Push-lock Turn Reset	1NC	RJSAS22E-8101	 红色/Red
		2NC	RJSAS22E-8102	

When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

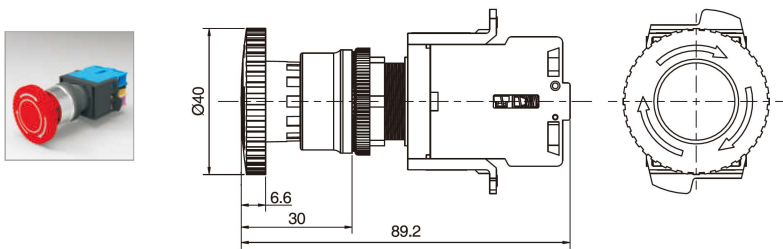

RJSAS22E Large Mushroom - with LED Illumination

Product appearance	Operation	Contact	Model	Colour	Rated Voltage
Ø40mm Mushroom 	Push-lock Turn Reset	1NC	RJSAS22E-8701	 Red	24VDC 12VDC 6.3VDC 110VAC 220VAC
		2NC	RJSAS22E-8702		

*按钮按下后呈锁定状态，拉出或顺时针旋转复位。
When pressed, the button is locked in the depressed position, and is reset when either pulled or turned clockwise.

